

**RECEIVED**

FEB 17 2001

① SAH  
② RRT

## UNITED STATES PATENT AND TRADEMARK OFFICE

Christie, Parker &amp; Hale, LLP

COMMISSIONER FOR PATENTS  
UNITED STATES PATENT AND TRADEMARK OFFICE  
WASHINGTON, D.C. 20231  
www.uspto.gov

APPLICATION NUMBER	FILING DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	DRAWINGS	TOT CLAIMS	IND CLAIMS
09/690,066	10/16/2000	2131	3538	36531/RRT/S850	10	161	5

CONFIRMATION NO. 3372

23363

CHRISTIE, PARKER & HALE, LLP  
350 WEST COLORADO BOULEVARD  
SUITE 500  
PASADENA, CA 91105

## FILING RECEIPT



\*OC00000005753541\*

CASE # S850: 36531 ACTION \_\_\_\_\_

REMINDER \_\_\_\_\_ DUE DATE \_\_\_\_\_

DEADLINE \_\_\_\_\_

Date Mailed: 02/12/2001

Receipt is acknowledged of this nonprovisional Patent Application. It will be considered in its order and you will be notified as to the results of the examination. Be sure to provide the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION when inquiring about this application. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. If an error is noted on this Filing Receipt, please write to the Office of Initial Patent Examination's Customer Service Center. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the PTO processes the reply to the Notice, the PTO will generate another Filing Receipt incorporating the requested corrections (if appropriate).

## Applicant(s)

Craig L. Ogg, Long Beach, CA;  
William W. Chow, Los Angeles, CA;  
Girish Venkat, Los Angeles, CA;  
Piers C. Lingle, Los Angeles, CA;

## Continuing Data as Claimed by Applicant

THIS APPLN CLAIMS BENEFIT OF 60/160,491 10/20/1999  
WHICH CLAIMS BENEFIT OF 60/160,503 10/20/1999  
WHICH CLAIMS BENEFIT OF 60/160,112 10/18/1999  
WHICH CLAIMS BENEFIT OF 60/160,563 10/20/1999  
WHICH CLAIMS BENEFIT OF 60/160,041 10/18/1999  
WHICH CLAIMS BENEFIT OF 60/193,057 03/29/2000  
WHICH CLAIMS BENEFIT OF 60/193,055 03/29/2000  
WHICH CLAIMS BENEFIT OF 60/193,056 03/29/2000

## Foreign Applications

If Required, Foreign Filing License Granted 12/01/2000

Projected Publication Date:

Non-Publication Request: No

Early Publication Request: No

**Title**

Cryptographic module for secure processing of value-bearing items

**Preliminary Class**

380

---

**Data entry by :** BARNES, CAROL

**Team :** OIPE

**Date:** 02/12/2001



**LICENSE FOR FOREIGN FILING UNDER  
Title 35, United States Code, Section 184  
Title 37, Code of Federal Regulations, 5.11 & 5.15**

**GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 36 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Office of Export Administration, Department of Commerce (15 CFR 370.10 (j)); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

**NOT GRANTED**

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

**PLEASE NOTE the following information about the Filing Receipt:**

- The articles such as "a," "an" and "the" are not included as the first words in the title of an application. They are considered to be unnecessary to the understanding of the title.
- The words "new," "improved," "improvements in" or "relating to" are not included as first words in the title of an application because a patent application, by nature, is a new idea or improvement.
- The title may be truncated if it consists of more than 600 characters (letters and spaces combined).
- The docket number allows a maximum of 25 characters.
- If your application was submitted under 37 CFR 1.10, your filing date should be the "date in" found on the Express Mail label. If there is a discrepancy, you should submit a request for a corrected Filing Receipt along with a copy of the Express Mail label showing the "date in."
- The title is recorded in sentence case.

Any corrections that may need to be done to your Filing Receipt should be directed to:

Assistant Commissioner for Patents  
Office of Initial Patent Examination  
Customer Service Center  
Washington, DC 20231

1 36531/RRT/S850

CRYPTOGRAPHIC MODULE FOR SECURE PROCESSING  
OF VALUE-BEARING ITEMS

5

CROSS-REFERENCE TO RELATED APPLICATIONS

This patent application claims the benefit of the filing date of United States Provisional Patent Applications Serial Nos. 60/160,491, filed October 20, 1999 and entitled "SECURE AND  
10 RECOVERABLE DATABASE FOR ON-LINE POSTAGE SYSTEM"; 60/160,503, filed October 20, 1999 and entitled "CRYPTOGRAPHIC MODULE ARCHITECTURE"; 60/160,112, filed October 18, 1999 and entitled "INTERNET POSTAL METERING SYSTEM"; 60/160,563, filed October 20, 1999 and entitled "SERVER ARCHITECTURE FOR ON-LINE POSTAGE  
15 SYSTEM"; 60/160,041, filed October 18, 1999 and entitled "CRYPTOGRAPHIC MODULE SECURITY APPROACH"; 60/193,057, filed March 29, 2000 and entitled "CUSTOMER GATEWAY DESIGN"; 60/193,055, filed March 29, 2000 and entitled "BROWSER-BASED IBI"; and 60/193,056, filed March 29, 2000 and entitled "MULTI-USER PSD  
20 DESIGN" the entire contents of which are hereby expressly incorporated by reference.

FIELD OF THE INVENTION

The present invention relates to secure printing of value-  
25 bearing items (VBI) preferably, postage. More specifically, the invention relates to a cryptographic module for secure printing of VBIs.

BACKGROUND OF THE INVENTION

A significant percentage of the United States Postal Service (USPS) revenue is from metered postage. Metered postage is generated by utilizing postage meters that print a special mark, also known as postal indicia, on mail pieces. Generally, printing postage and any VBI can be carried out by using  
35 mechanical meters or computer-based systems.

With respect to computer-based postage processing systems, the USPS under the Information-Based Indicia Program (IBIP) has published specifications for IBIP postage meters that identify a special purpose hardware device, known as a Postal Security Device (PSD) that is generally located at a user's site. The PSD, in conjunction with the user's personal computer and printer, functions as the IBIP postage meter. The USPS has published a number of documents describing the PSD specifications, the indicia specifications and other related and relevant information. There are also security standards for printing other types of VBI, such as coupons, tickets, gift certificates, currency, voucher and the like.

A significant drawback of existing hardware-based systems is that a new PSD must be locally provided to each new user, which involves significant cost. Furthermore, if the additional PSD breaks down, service calls must be made to the user location. In light of the drawbacks in hardware-based postage metering systems, a software-based system has been developed that does not require specialized hardware for each user. The software-based system meets the IBIP specifications for a PSD, using a centralized server-based implementation of PSDs utilizing one or more cryptographic modules. The system also includes a database for all users' information. The software-based system, however, has brought about new challenges.

The software-based system should be able to handle secure communications between users and the database. In a hardware-based system, security is generally handled by the local hardware piece, that is unique to each user and includes an encryption processor that encrypts that user's information and communications. However, as mentioned above, this hardware-based system has significant disadvantages.

Therefore, there is a need for a new method and apparatus for implementation of VBI secure printing and a secure IBIP

1 36531/RRT/S850

postage meter over a WAN that does not require the special  
purpose hardware device at the user site. Furthermore, there is  
5 a need for a secure system and database that are capable of  
preventing unauthorized access and tampering.

#### SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention, an  
10 on-line VBI printing system that includes one or more  
cryptographic modules and a central database has been designed.  
The cryptographic modules serve the function of the PSDs and are  
capable of implementing the USPS Information Based Indicia  
Program Postal Security Device Performance Criteria and the  
15 cryptographic security requirements specified by Federal  
Information Processing Standards (FIPS) 140-1, Security  
Requirements for Cryptographic Modules, and other required  
standards. The modules encipher the information stored in the  
central database for all of the on-line VBI system customers and  
20 are capable of preventing access to the database by unauthorized  
users. Also, a secure communication network is in operation to  
prevent unauthorized access to the users' data stored in the  
centralized database. Additionally, the cryptographic module is  
capable of preventing unauthorized and undetected modification,  
25 including the unauthorized modification, substitution, insertion,  
and deletion of VBI related data and cryptographically critical  
security parameters.

Each module prevents the unauthorized disclosure of the non-  
public contents of the VBI data, such as a postage meter,  
30 including plaintext cryptographic keys and other critical  
security parameters. The module also ensures the proper  
operation of cryptographic security and VBI related meter  
functions. The module detects errors in the operation of  
security mechanisms and prevents the compromise of meter data and

35

critical cryptographic security parameters as a result of those errors.

5 In one aspect the present invention is a method for secure printing of value-bearing items over a computer network comprising the step of; storing information about users in a database remote from the user terminals; securing the information about the users in the database by a plurality of cryptographic  
10 devices remote from the user terminals and coupled to the computer network; securing data stored in the database by the plurality of cryptographic devices, wherein each of the plurality of cryptographic devices includes a subsystem for authenticating one or more of the plurality of users; storing a plurality of  
15 security device transaction data stored in the database wherein, each transaction data is related to a user; ensuring authenticity and authority of each of the plurality of users; and loading a security device transaction data related to a user into one of the plurality of cryptographic devices when the user requests to  
20 operate on a value bearing item.

It is to be understood that the present invention is useful for printing not only postage, but any VBIs, such as coupons, tickets, gift certificates, currency, voucher and the like.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

The objects, advantages and features of this invention will become more apparent from a consideration of the following detailed description and the drawings, in which:

FIG. 1 is an exemplary block diagram for the client/server  
30 architecture of one embodiment of the present invention;

FIG. 2 is an exemplary block diagram of a remote user computer connected to a server via Internet according to one embodiment of the present invention;

FIG. 3 is an exemplary block diagram of a cryptographic  
35 device according to one embodiment of the present invention;

FIG. 4 is an exemplary block diagram of servers, databases,  
and services according to one embodiment of the present  
5 invention;

FIG. 5 is an exemplary block diagram of a client software,  
a cryptographic module, and a typical transaction between them  
during an operational state according to one embodiment of the  
present invention;

10 FIG. 6 is an exemplary state transition diagram for a  
cryptographic device according to one embodiment of the present  
invention;

FIG. 7 is an exemplary diagram of audit chaining according  
to one embodiment of the present invention;

15 FIG. 8 is an exemplary diagram of multiple user PSD  
according to one embodiment of the present invention.;

FIG. 9 is an exemplary diagram of multiple users using a  
gateway server according to one embodiment of the present  
invention; and

20 FIG. 10 is an exemplary diagram of a browser-based design  
with or without a UI according to one embodiment of the present  
invention.

#### DETAILED DESCRIPTION

25 In one aspect, the system and method of the present  
invention prevent unauthorized electronic access to a database  
subsystem and secure customers' related data, among others. One  
level of security is achieved by protecting the database  
subsystem by a postal server subsystem. The postal server  
30 subsystem controls preferably, all communications with the  
database subsystem by executing an authentication algorithm to  
prevent unauthorized access. Another level of security is  
achieved by encrypting preferably, all communications between the  
client system and the postal server subsystem. The encryption-  
35 decryption function is employed using commonly known algorithms,



1 36531/RRT/S850

such as, Rivest, Shamir and Adleman ("RSA") public key encryption, DES, Triple-DES, Pseudo-random number generation, and  
5 the like algorithms. Additionally, DSA signature, and SHA-1 hashing algorithms may be used to digitally sign a postage indicium.

Another measure of security is the interaction between a cryptographic module and the database subsystem whenever a PSD  
10 transaction (security device transaction) is initiated. The cryptographic module and the database subsystem cross-verify the last PSD transaction (security device transaction) before proceeding with the next PSD transaction. If the last transaction record in the cryptographic module and the database  
15 subsystem do not match, then the on-line postage system shuts down until the situation can be investigated. This verification process protects against attempts of unauthorized individuals to replace the database subsystem. The registers in the cryptographic modules are cryptographically protected to achieve  
20 another level of security.

An exemplary on-line postage system is described in U.S. patent Application No. 09/163,993 filed September 15, 1998, the entire contents of which are hereby incorporated by reference herein. The on-line postage system includes an authentication  
25 protocol that operates in conjunction with the USPS requirements. The system utilizes on-line postage system software comprising user code that resides on a client system and controller code that resides on a server system. The on-line postage system allows a user to print a postal indicium at home, at the office,  
30 or any other desired place in a secure, convenient, inexpensive and fraud-free manner. The system comprises a user system electronically connected to a server system, which in turn is connected to a USPS system.

Each of the cryptographic modules may be available for use  
35 by any user. When a user requests a PSD service, one of the

1 36531/RRT/S850

available modules is loaded with data belonging to the user's account and the transaction is performed. When a module is  
5 loaded with a user's data ,that module becomes the user's PSD. The database record containing each user's PSD data is referred to as the "PSD package" (security device transaction data). After each PSD transaction is completed, the user's PSD package is updated and returned to a database external to the module.  
10 The database becomes an extension of the module's memory and stores not only the items specified by the IBIP for storage inside the PSD, but also the user's personal cryptographic keys and other security relevant data items (SRDI) and status information needed for continuous operation. Movement of this  
15 sensitive data between the modules and the database is secured to ensure that PSD packages could not be compromised.

In one embodiment, the server system is remotely located in a separate location from the client system. All communications between the client and the server are preferably accomplished via  
20 the Internet. FIG. 1 illustrates a remote client system 220a connected to a server system 102 via the Internet 221. The client system includes a processor unit 223, a monitor 230, printer port 106, a mouse 225, a printer 235, and a keyboard 224. Server system 102 includes Postage servers 109, Database 130, and  
25 cryptographic modules 110.

An increase in the number of servers within the server system 102 will not negatively impact the performance of the system, since the system design allows for scalability. The Server system 102 is designed in such a way that all of the  
30 business transactions are processed in the servers and not in the database. By locating the transaction processing in the servers, increases in the number of transactions can be easily handled by adding additional servers. Also, each transaction processed in the servers is stateless, meaning the application does not  
35 remember the specific hardware device the last transaction.

1 36531/RRT/S850

utilized. Because of this stateless transaction design, multiple servers can be added to each appropriate subsystem in order to handle increased loads.

Furthermore, each cryptographic module is a stateless device, meaning that a PSD package can be passed to any device because the application does not rely upon any information about what occurred with the previous PSD package. Therefore, multiple cryptographic modules can also be added to each appropriate subsystem in order to handle increased loads. A PSD package for each cryptographic module is a database record, stored in the server database, that includes information pertaining to one customer's service that would normally be protected inside a cryptographic module. The PSD package includes all data needed to restore the PSD to its last known state when it is next loaded into a cryptographic module. This includes the items that the IBIP specifications require to be stored inside the PSD, information required to return the PSD to a valid state when the record is reloaded from the database, and data needed for record security and administrative purposes.

In one embodiment, the items included in a PSD package include ascending and descending registers (the ascending register "AR" records the amount of postage that is dispensed or printed on each transaction and the descending register "DR" records the value or amount of postage that may be dispensed and decreases from an original or charged amount as postage is printed.), device ID, indicia key certificate serial number, licensing ZIP code, key token for the indicia signing key, the user secrets, key for encrypting user secrets, data and time of last transaction, the last challenge received from the client, the operational state of the PSD, expiration dates for keys, the passphrase repetition list and the like.

As a result, the need for specific PSDs being attached to specific cryptographic modules is eliminated. A Postal Server

1 36531/RRT/S850

subsystem provides cryptographic module management services that allow multiple cryptographic modules to exist and function on one  
5 server, so additional cryptographic modules can easily be installed on a server. The Postal Sever subsystem is easy to scale by adding more cryptographic modules and using commonly known Internet load-balancing techniques to route inbound requests to the new cryptographic modules.

10 Referring back to FIG. 1, Postage servers 109 includes one or more Postal servers and provide indicia creation, account maintenance, and revenue protection functionality for the on-line postage system. The Postage servers 109 include several physical servers in several distinct logical groupings, or services as  
15 described below. The individual servers could be located within one facility, or in several facilities, physically separated by great distance but connected by secure communication links.

Cryptographic modules 110 are responsible for creating PSDs and manipulating PSD data to protect sensitive information from  
20 disclosure, generating the cryptographic components of the digital indicia, and securely adjusting the user registration. When a user wishes to print VBI , for example, postage or purchase additional VBI or postage value, a user state is instantiated in the PSD implemented within one of the  
25 cryptographic modules 110. Database 111 includes all the data accessible on-line for indicia creation, account maintenance, and revenue protection processes. Postage servers 109, Database 130, and cryptographic modules 110 are maintained in a physically secured environment, such as a vault.

30 FIG. 2 shows a simplified system block diagram of a typical Internet client/server environment used by an on-line postage system in one embodiment of the present invention. PCs 220a-220n used by the postage purchasers are connected to the Internet 221 through the communication links 233a-233n. Each PC has access  
35 to one or more printers 235. Optionally, as is well understood

1 36531/RRT/S850

in the art, a local network 234 may serve as the connection between some of the PCs, such as the PC 220a and the Internet 221 or other connections. Servers 222a-222m are also connected to the Internet 221 through respective communication links. Servers 222a-222m include information and databases accessible by PCs 220a-220n. The on-line VBI system of the present invention resides on one or more of Servers 222a-222m.

10 In this embodiment, each client system 220a-220m includes a CPU 223, a keyboard 224, a mouse 225, a mass storage device 231, main computer memory 227, video memory 228, a communication interface 232a, and an input/output device 226 coupled and interacting via a communication bus. The data and images to be displayed on the monitor 230 are transferred first from the video memory 228 to the video amplifier 229 and then to the monitor 230. The communication interface 232a communicates with the servers 222a-222m via a network link 233a. The network link connects the client system to a local network 234. The local network 234 communicates with the Internet 221.

20 In one embodiment, a customer, preferably licensed by the USPS and registered with an IBIP vendor (such as Stamps.com), sends a request for authorization to print a desired amount of VBI, such as postage. The server system verifies that the user's account holds sufficient funds to cover the requested amount of postage, and if so, grants the request. The server then sends a cryptographically authenticated response specifying the VBI to the client system. The client system then sends image information for printing of a postal indicium for the granted amount to a printer so that the postal indicium is printed on an envelope or label.

30 In one embodiment, when a client system sends a VBI print request to the server system, the request needs to be authenticated before the client system is allowed to print the VBI, and while the VBI is being printed. The request is

1 36531/RRT/S850

cryptographically authenticated using an authentication code. The client system sends a password (or passphrase) entered by a user to the server for verification. If the password fails, a preferably asynchronous dynamic password verification method terminates the session and printing of the VBI is aborted. Also, the server system communicates with a system located at a certification authority for verification and authentication purposes.

In one embodiment, the information processing components of the on-line postage system include a client system, a postage server system located in a highly secure facility, a USPS system and the Internet as the communication medium among those systems. The information processing equipment communicates over a secured communication line.

Preferably, the security and authenticity of the information communicated among the systems are accomplished on a software level through the built-in features of a Secured Socket Layer (SSL) Internet communication protocol. An encryption hardware module embedded in the server system is also used to secure information as it is processed by the secure system and to ensure authenticity and legitimacy of requests made and granted.

The on-line VBI system does not require any special purpose hardware for the client system. The client system is implemented in the form of software that can be executed on a user computer (client system) allowing the user computer to function as a virtual VBI meter. The software can only be executed for the purpose of printing the VBI indicia when the user computer is in communication with a server computer located, for example, at a VBI meter vendor's facility (server system). The server system is capable of communicating with one or more client systems simultaneously.

In one embodiment of the present invention, the cryptographic modules 110 are FIPS 140-1 certified hardware cards

1 36531/RRT/S850

that include firmware to implement PSD functionality in a cryptographically secure way. The cryptographic modules are  
5 inserted into any of the servers in the Postal Server Infrastructure. The cryptographic modules are responsible for creating PSDs and manipulating PSD data to generate and verify digitally signed indicia. Since the PSD data is created and signed by a private key known only to the module, the PSD data  
10 may be stored externally to the cryptographic modules without compromising security.

FIG. 3 is a block diagram of an exemplary cryptographic module. Processor 302 is electrically coupled to the RAM 303, NVM 304, ROM 305. I/O interface 307, Random Number Generator  
15 (RNG) 308, Cipher Engine 310, and Clock 309 through the bus 301. NVM 304 and ROM 305 are protected from unauthorized access by the Hardware Locks control 306. A Security sensing & Response (SSR) circuit 311 detects any attempts to tamper with the module and acts accordingly. The SSR circuit includes sensors to protect  
20 against attacks involving probe penetration, power sequencing, radiation, temperature manipulation, and the like, consistent with some security standards, such as FIPS 140-1 Level 3 and 4 requirements. If the tamper sensors are triggered, the cipher Engine 310 resets its critical keys, destroys its certification, and is rendered inoperable.  
25

Initially, the module generates a unique key pair, which is stored in the secured NVM. The tamper detection circuitry is activated at this time and remains active throughout the useful life of the module, protecting this private key, as well as all  
30 other keys and sensitive data. The module's private key is certified by a private key and the certificate is retained in the module. Subsequently, the module's private key is used to sign module status responses which, in conjunction with a series of public key certificates, demonstrates that the module remains  
35 intact and is genuine. As a result, only the software that has

been signed by an entity trusted by the module (via the embedded public key) will be loaded.

5 Cipher Engine 310 supports multiple custom cryptographic engines and other accelerated state machines to provide complex and numerically intensive operations required for encryption/decryption, authentication, and key management. RNG 308 generates the required data for the Cipher Engine. Clock &  
10 Calender circuit 309 generates real-time clock and calender for the Cipher Engine and the I/O interface 307 provides interface to other devices on a computer network.

In one embodiment, Cipher Engine 310 includes the following logical elements:

- 15 • A DES Engine including the following features:
  - DES, Triple DES, MAC and Triple-DES MAC functions
  - Electronic codebook (ECB) support and cipher block chain (CBC) modes of operation
  - 3 internal 64-bit key registers loaded from a ISA port
  - 20 • 64-bit initial vector register loadable from a ISA port
  - 64-bit input & output registers readable from both a 16-bit ISA port or a 32-bit PCI add-on port via the output FIFO
  - 25 • Optional DES assist for data padding of data blocks which are not multiples of 64-bytes
- A SHA Engine including the following features:
  - SHA-1 secure hash algorithm
  - Four 32-bit K registers with fast initialization to FIPS-180 Constants via an ISA port accessible control register
  - 30 • Five 32-bit H registers with fast initialization to FIPS-180 initial values by an ISA port accessible control register. Hashing data loadable into H registers via the 16-bit ISA port or the 32-bit PCI
  - 35



1 36531/RRT/S850

add-on port and input FIFO. Hash results readable from five 32-bit H registers via ISA port.

- 5       • Five internal registers for SHA-1 hash results creation
- SHA engine exercises FIPS 180-1 algorithm. Digital Signature Standard FIPS PUB-186 pseudo random number creation possible by programming K constants and H initialization vector registers via the ISA bus input.
- 10

A RSA Engine capable of performing the following modular arithmetic and exponentiation functions for high speed RSA encryption:

15	Modular Exponentiation With CRT (chinese remainder theorem)	$R = A^{(B_p, B_q)} \bmod (N_p, N_q)$
	Modular exponentiation	$R = A^B \bmod N$
	Modular multiplication	$R = (A * B) \bmod N$
20	Modular addition	$R = (A + B) \bmod N$
	Addition	$R = (A + B)$
	Subtraction	$R = (A - B)$
	2's complement	$R = \sim A + 1$
25	Signature	$R = A^B \bmod N; \text{if } (2R \geq N) R = N - R$
	Verify	$R = A^B \bmod N; \text{if } (R \bmod 16 \neq 6) R = N - R$

30

35

The RSA engine is a 2048-bit engine with the following registers:

5	Operand Register	Length (bits)	Contents
	A	2048	Data
	B	2048	Exponent
10	$B_p$	1088	CRT Mod Expo. only
	$B_q$	1024	CRT Mod Expo. only
	N	2048	Module
	$N_q$	1088	CRT Mod Expo. only
	$N_p$	1024	CRT Mod Expo. only
15	U	1088 (CRT only)	Multiplicative inverse for CRT
	R	2048	Results

20 Registers  $B_1$ ,  $B_{p1}$ ,  $B_{q1}$ ,  $N_1$ ,  $N_{p1}$ ,  $N_q$  and U are write only from the ISA port of the UltraCypher module.

Register R (results) is read only from the ISA port of the UltraCypher module  
Chinese Remainder (CRT) Operands

A = data

25  $B_p$  = the largest of two odd primes so  $N = N_p * N_q$

$B_q$  = the smallest of two odd primes so  $N = N_p * N_q$

$N_p = B \bmod (N_p - 1)$

$N_q = B \bmod (N_q - 1)$

U = Multiplicative inverse:  $N_q^{-1} \bmod N_p$

30 Exponentiation performance can be enhanced by enabling the built-in Chinese Remainder Theorem (CRT) algorithm.

In this embodiment, there are ten 16-bit Control, Setup, and Status registers which are written and read via the ISA bus. Some are read only and some are write only from outside of the module. These registers control the data paths and various

35

1 36531/RRT/S850

engines inside of the module and provide information as to the status of the engines and FIFO's.

5 A 64-bit shift register is provided for the collecting of Random data bits generated from outside the module. The external 1-bit input (usually a random noise source) is sampled and loaded into bit-0 of the shift register. The sampling rate is controlled from control register bits which are loaded via the  
10 ISA bus. The collected data bits are shifted after each new sampling of data. When the shift register is full of new data an interrupt is generated and the shift register contents may be read from the ISA data port.

A 128x32-bit Input FIFO and a similar Output FIFO is  
15 provided in the module to buffer a PCI Add-on bus.

20	INPUT FIFO Inputs	INPUT FIFO Outputs	OUTPUT FIFO Inputs	OUTPUT FIFO Outputs
	PCI add-on bus	DES engine	DES engine	PCI add-on bus
	ISA bus	SHA-1 engine	ISA bus	ISA bus
		OUTPUT FIFO	INPUT FIFO	
		ISA bus		

25 A multipurpose 16-bit data interface supports an ISA 16-bit cycles. Addressing of the module's internal registers is via the ISA address bus. The PCI Add-on bus is capable of supporting PCI bus master. There are also 8 IRQ interrupt outputs, reset, other control lines, clock I/O.

30 The cryptographic module of the present invention may be embodied in a single-chip module, a multi-chip embedded module, a multi-chip standalone module, embedded in software running on a computer such as a personal computer, or the like.

The on-line VBI system is based on a client/server  
35 architecture. Generally, in a system based on client/server

1 36531/RRT/S850

architecture the server system delivers information to the client system. That is, the client system requests the services of a  
5 generally larger computer. In one embodiment, the client is a local personal computer and the server is a more powerful group of computers that house the information. The connection from the client to the server is made via a Local Area Network, a phone line or a TCP/IP based WAN on the Internet. A primary reason to  
10 set up a client/server network is to allow many clients access to the same applications and files stored on the server system.

In one embodiment, Postage servers 109 include a string of servers connected to the Internet, for example, through a T1 line, protected by a firewall. The firewall permits a client to  
15 communicate with a server system, only if the information packet transmitted by the client system complies with a security policy set by the server system. The firewall not only protects the system from unauthorized users on the Internet, it also separates the Public Network (PUBNET) from the Private Network (PRVNET).  
20 This ensures that packets from the Internet will not go to any location but the PUBNET. The string of servers form the different subsystems of the on-line postal system. The services provided by the different subsystems of the on-line postage system are designed to allow flexibility and expansion and reduce  
25 specific hardware dependancy.

The Database subsystem is comprised of multiple databases. FIG. 4 illustrates an overview of the on-line VBI system which includes the database subsystems. Database 411 includes the Affiliate DBMS and the Source IDs DBMS. The Affiliate DBMS  
30 manages affiliate information (e.g., affiliate's name, phone number, and affiliate's Website information) that is stored on the Affiliate Database. Using the data from this database, marketing and business reports are generated. The Source IDs Database contains information about the incoming links to the  
35 vendor's Website (e.g., partners' information, what services the

1 36531/RRT/S850

vendor offers, what marketing program is associated with the incoming links, and co-branding information). Using the data from this database, marketing and business reports are generated.

The Online Store Database 412 contains commerce product information, working orders, billing information, password reset table, and other marketing related information. Website database 410 keeps track of user accesses to the vendor website. This database keeps track of user who access the vendor website, users who are downloading information and programs, and the links from which users access the vendor website. After storing these data on the Website Database 410, software tools are used to generate the following information:

- 15 • Web Site Status
- Web Site Reports
- Form Results
- Download Successes
- Signup, Downloads, and Demographic Graphs
- 20 • Web Server Statistics (Analog)
- Web Server Statistics (Web Analyzer)

Offline database 409 manages the VBI (e.g., postal) data except meter information, postal transactions data, financial transactions data (e.g., credit card purchases, free postage issued, bill credits, and bill debits), customer marketing information, commerce product information, meter license information, meter resets, meter history, and meter movement information. Consolidation Server 413 acts as a repository for data, centralizing data for easy transportation outside the vault 400. The Consolidation Server hosts both file and database services, allowing both dumps of activity logs and reports as well as a consolidation point for all database data.

The Offline Reporting Engine MineShare Server 415 performs extraction transformation from the holding database that received transaction data from the Consolidated Database (Commerce

1 36531/RRT/S850

database 406, Membership database 408, and Postal Database 407). Also, the Offline Reporting Engine MineShare Server handles some administrative tasks. Transaction data in the holding database contains the transaction information about meter licensing information, meter reset information, postage purchase transactions, and credit card transactions. After performing extraction transformation, business logic data are stored on Offline Database 409. Transaction reports are generated using the data on the Offline Database. Transaction reports contain marketing and business information.

The Data Warehouse database 414 includes all customer information, financial transactions, and aggregated information for marketing queries (e.g., how many customers have purchased postage). In one embodiment, commerce Database 406 includes a Payment Database, an E-mail Database, and a Stamp Mart Database. The E-mail DBMS manages access to the contents of e-mail that were sent out to everyone by vendor servers. The Stamp Mart database handles order form processing. The E-commerce Server 404 provides e-commerce related services on a user/group permission basis. It provides commerce-related services such as payment processing, pricing plan support and billing as well as customer care functionality and LDAP membership personalization services.

A Credit Card Service is invoked by the E-commerce Server 404 to authorize and capture funds from the customer's credit card account and to transfer them to the vendor's merchant bank. A Billing Service is used to provide bills through e-mail to customers based on selected billing plans. An ACH service runs automatically at a configurable time. It retrieves all pending ACH requests and batches them to be sent to bank for postage purchases (i.e. money destined for the USPS), or Chase for fee payments which is destined for the vendor account.

35

1 36531/RRT/S850

The E-commerce DBMS 406 manages access to the vendor specific Payment, Credit Card, and Email Databases. A Membership  
5 DBMS manages access to the LDAP membership directory database 408 that hosts specific customer information and customer membership data. A Postal DBMS manages access to the Postal Database 407 where USPS specific data such as meter and licensing information are stored. A Postal Server 401 provides secure services to the  
10 Client, including client authentication, postage purchase, and indicia generation. The Postal Server requires cryptographic modules to perform all functions that involve client authentication, postage purchase, and indicia generation.

Postal Transaction Server 403 provides business logic for  
15 postal functions such as device authorization and postage purchase/register manipulation. The Postal Transaction Server requires the cryptographic modules to perform all functions. There are four Client Support Servers. Address Matching Server (AMS) 417 verifies the correct address specified by a user. When  
20 the user enters a delivery address or a return address using the Client Software, the user does not need the address matching database on the user's local machine to verify the accuracy of the address. The Client software connects to the vendor's server and uses the central address database obtained from the USPS to  
25 verify the accuracy of the address. If the address is incorrect, the client software provides the user with a prioritized list of addresses to match the correct address. These choices are ranked in a user definable order. This information is represented using a plain text format.

30 The Client Support Servers 417 provides the following services: a Pricing Plan service, an Auto Update service, and a Printer Config service. The Pricing Plan Service provides information on pricing plans and payment methods available to the user. It also provides what credit cards are supported and  
35 whether ACH is supported. This information is represented

1 36531/RRT/S850

preferably using a plain text format. The Auto Update Service verifies whether the user is running the latest Client Software. If there is newer Client Software, the Auto Update Server downloads the new patches to the user computer. The Client Support Database has tables for the client software update information. This information is represented using a plain text format.

10 Before the user tries to print postage, the user sends his or her printer driver information over the Internet in plain text. The Printer Config Service looks up the printer driver information in the Printer Driver Database to determine whether the printer driver is supported or not. When the user tries to  
15 configure the printer, the user prints a test envelope to test whether the postage printing is working properly or not. This testing envelope information is sent over the Internet in plain text and is stored in the Client Support Database.

MeterGen server 422 makes calls into the cryptographic  
20 module to create sufficient meters to ensure that the vendor can meet customer acquisition demands. SMTP Server 418 communicates with other SMTP servers, and it is used to forward e-mail to users. Gatekeeper Server works as a proxy server by handling the security and authentication validation for the smart card users  
25 to access customer and administration information that reside in the vault.

The Proxy Server 423 uses the Netscape™ Enterprise SSL library to provide a secure connection to the vault 400. Audit File Server 419 acts as a repository for module transaction logs.  
30 The Audit logs are cryptographically protected. The Audit File Server verifies the audit logs that are digitally signed. The audit logs are verified in real time as they are being created. Postal Server writes audit logs to a shared hard drive on the Audit File Server. After these logs are verified, the Audit File

35



1 36531/RRT/S850

Server preferably moves them from the shared hard drive to a storage device that is not shared by any of the vendor servers.

5 Provider Server provides reporting and external communication functionality including the following services. CMLS Service forwards license applications and it processes responses from CMLS. The CMLS Service uses cryptographic functions provided by the Stamps.com Crypt library to decrypt the  
10 user's SSN/Tax ID/Employee ID. CMRS Service reports meter movement and resetting to the USPS Computerized Meter Resetting infrastructure. ACH Service is responsible for submitting ACH postage purchase requests to the USPS lockbox account at the bank. The CMLS Service uses cryptographic functions to decrypt  
15 the user's ACH account number.

After decrypting ACH account information, the ACH is encrypted using the vendor's script library. Then, the encrypted ACH file is e-mailed to the Commerce Group by the SMTP server. When the Commerce Group receives this encrypted e-mail, the  
20 vendor's Decrypt utility application is used to decrypt the ACH e-mail. After verifying the ACH information, the Commerce Group sends the ACH information through an encrypted device first and then uses a modem to upload the ACH information to a proper bank. The Certificate Authority issues certificates for all IBIP  
25 meters. The certificates are basically used to provide authentication for indicia produced by their respective meters.

The following are exemplary steps describing the certificate authorization process:

- MeterGen asks the module to create a meter package,
- 30 • The module returns a package and the meter's public key,
- MeterGen creates a certificate request with the public key, signs the request with a USPS-issued smartcard, and submits the request to the USPS Certificate Authority,

35

1 36531/RRT/S850

- The Certificate Authority verifies the request came from the vendor then, it creates a new certificate and returns it to MeterGen,
- MeterGen verifies the certificate using the USPS Certificate Authority's certificate (e.g., to ensure it wasn't forged) and stores the certificate information in the package. The package is now ready to be associated with a customer.

The Postal Server subsystem 401 controls client and remote administration access to server functionality, authenticates clients and allows clients to establish a secure connection to the on-line postage system. The Postal Server subsystem also manages access to USPS specific data such as PSD information and a user's license information. The Postal Server subsystem queries the Postal portion of the Database subsystem for the necessary information to complete the task. The query travels through the firewall to the Postal portion of the Database subsystem. The Postal Server subsystem is the subsystem in the Public Network that has access to the Database subsystem.

In one embodiment of the present invention, Postal Server 401 is a standalone server process that provides secure connections to both the clients and the server administration utilities, providing both client authentication and connection management functionality to the system. Postal Server 401 also houses postal-specific services that require high levels of security, such as purchasing postage or printing indicia. Postal Server 401 is comprised of at least one server, and the number of servers increases when more clients need to be authenticated, are purchasing postage or are printing postage indicia.

The growth in the number of servers of the Postal Server will not impact the performance of the system since the system design allows for scalability. The Postal Server is designed in such a way that all of the business logic is processed in the

1 36531/RRT/S850

servers and not in the database. By locating the transaction processing in the servers, increases in the number of transactions can be easily handled by adding additional servers. Also, since each transaction is stateless (the application does not remember the specific hardware device the last transaction utilized), multiple machines can be added to each subsystem in order to handle increased loads. In one embodiment, load balancing hardware and software techniques are used to distribute traffic among the multiple servers.

Typically, the security requirements of an online VBI system entail protections of two basic types: Logical and Physical, or both. Logical protections employ cryptographic techniques involving encryption algorithms and authentication processes. Physical security measures are required to prevent undetected tamper and to protect stored critical data from unauthorized access, modification or destruction. The PSD functionality and data are to be protected by the cryptographic modules.

For the embodiment that includes printing postage, system functional requirements are based on the IBIP specifications. The PSD is preferably located at a central location (for example, the Internet server) and may service multiple clients. The PSD's functions include client authorization (assignment of a "meter" to a client), postage register arithmetic operations, creation and printing of a valid postage, messages between the provider infrastructure and PSD, and the like.

The following functional security objectives are achieved by the cryptographic module according to one aspect of the present invention:

- preventing unauthorized and undetected modification of data, including the unauthorized modification, substitution, insertion, and deletion of postage related data and cryptographically critical security parameters;

1 36531/RRT/S850

- preventing the unauthorized disclosure of the non-public contents of the postage meter, including plaintext cryptographic keys and other critical security parameters;
- ensuring the proper operation of cryptographic security and postage related meter functions;
- detecting errors in the operation of security mechanisms and to prevent the compromise of meter data and critical cryptographic security parameters as a result of those errors;
- providing indications of the operational state of the postage meter; and
- employing generally accepted security methods for the protection of the meter and cryptographic module, and their contents.

20 The cryptographic module is capable of supporting authorized roles and the corresponding services that can be performed within those roles. Since the module can support multiple concurrent operators, the module internally maintains the separation of the roles and services performed by each operator. Furthermore, a cryptographic module is used to employ access control mechanisms to authenticate an operator accessing the module (either directly or indirectly via a computer process acting on his or her behalf) and to verify that the operator is authorized to assume the desired role and to perform the desired services within that role.

In one embodiment, the roles supported by the module includes the following roles:

35

1 36531/RRT/S850

- Security Officer role initiates key management functions, including import, export, activation and de-activation of keys.  
5
- Key Custodian role takes possession of (encrypted) shares of keys during key export and enter them during key import.
- 10 • Administrator role manages the user access control database.
- Auditor role manages (views, saves, archives, and deletes) audit logs.
- 15 • Provider role transmits signed messages to the PSD's for postage refilling and other provider functions.
- User role performs the expected IBIP postal meter operations.  
20
- Certificate Authority role allows the PSD's public key certificate to be loaded and verified.

Access to the first four of the above listed roles is preferably obtained by logging on from a computer connected to the cryptographic module. Software applications on the computer and in the module first establish a secure communications channel (a session). A session master key is established using a NIST approved protocol, for example, anonymous unauthenticated Diffie-Hellman key exchange. The Diffie-Hellman system parameters,  $p$  and  $q$ , are embedded in the software of the module and the associated computer. Because the Diffie-Hellman protocol is vulnerable to certain attacks, preferably, the computer and the module are isolated from the LAN whenever a secure session is required. The master key is then used to derive transaction keys (for MACing  
35

1 36531/RRT/S850

and encrypting) that are changed after each message is transmitted.

5

Once the secure session with the module is established, the entities logging on can input their names and passphrases to provide identity based authentication for the selected role. During the initializing state of the module, access control data for the entity that will assume the administrator role is entered  
10 in a module access control database. This allows the administrator to log on and enter access control data for all other entities who will require access to the module.

15

The confidentiality requirement in FIPS 140-1 mandates encryption of all sensitive security parameters, including passwords. The cryptographic module of the present invention establishes the session and its security services first, and then transmits the password over the encrypted (and authenticated) channel.

20

The user passphrase as typed on the keyboard is hashed by the host machine and the module only has knowledge of the hash value. In the remainder of this document, the hashed passphrase as used to get access to the module is called the password.

25

Preferably, there is no operational requirement to have more than one user logged on at the same time, or to have users with more than one role. This is desirable because of separation of duties. In one embodiment, for each action that is requested, the access control makes it clear which user requested it, and  
30 what his role(s) is (are). This holds irrespective of whether the request is granted or denied. This would be difficult to achieve if more than one user is logged on at the same time.

35

Certain roles have disjoint sets of authorized commands. For example, an Auditor is not authorized to perform any

1 36531/RRT/S850

operational or key management related commands. While it is possible to check that a user does not possess certain roles are well as verifying that he does possess another role (e.g., verify that the user is not an Administrator, and is a Security Officer), this would complicate the code and the design. A more elegant and foolproof method is to disallow users to hold multiple roles. If one physical user ever has to have more than one role, an easy solution is to provide multiple accounts for this user, one account for each role.

In one embodiment, for each user, the following user profile data is maintained inside the module, in permanent storage:

- 15       • Username (User ID, UID)
- User Role (Role ID, RID)
- Password (hashed passphrase)
- 20       • Logon failure count
- Logon failure limit
- Logon time-out limit
- 25       • Account expiration
- Password expiration
- Password period (the period for which password validity is granted when changing it).
- 30

The following functions are provided for access management:

- Initialization of the access control database.
- 35       • Begin Admin (transition to Administrative state).

1 36531/RRT/S850

- End Admin (transition back to Operational state).
- 5 • Creation of an account.
- Deletion of an account.
- Modification of an account.
- 10 • Viewing the access control database. This command lists all users and their roles, account expiration, last access, but (of course) not the user passwords.
- Logon.
- 15 • Logoff.
- Query Current User Role.
- Query Current User ID.
- 20 • Change password.
- Set the internal module clock.
- Get Status.

25 The initialization of the access control database creates the minimal set of users required by the module. This set includes one Administrator, one Security Officer and at least two Key Custodians. This command is the first command in Initializing state, as all other commands require one of these

30 users. Creation, deletion and modification of an account and access control database and setting the internal module clock are restricted to users with Administrator role, in Administrative state only. Administrative state is entered by the Start Admin command, issued by a Security Officer in Operational state.

35



1 36531/RRT/S850

5 All sensitive Administrative commands are collected in Administrative state and require Administrator user role. This separation of roles ensures dual control. Secondly, the transition to Administrative state will ensure that no operational commands can be issued by the Administrator (separation of duties). Finally, Administrative state can only be reached from Operational state, ensuring that initialization of the module has been completed successfully before any administrative command can be issued. The End Admin command causes the module to transition back to Operational state.

15 Preferably, the cryptographic module only allows one session to be established at a time. After authenticating to select a role, the entity can then issue any command that is available to that role. Preferably, meter users are authenticated on a command-by-command basis. During the user registration process, a DES MAC key, generated by the client cryptographic software, is transmitted to the module and is stored in the client's PSD package. Each command from a user that requests PSD services is DES MAC'ed with his personal DES MAC key which allows the module to authenticate the user. Many clients can be simultaneously connected to the transaction server and the module(s) will respond to their requests for service as each request is received from a client.

30 The provider is authenticated on a command-by-command basis. Provider messages are signed using DSA. The signature is verified using the public key which is loaded into the module when it is initialized for postal operation. The certificate authority role is authenticated by using the Certificate Authority ("CA") certificate to verify the signature on the PSD's public key certificate. In one embodiment, the module implements identity based authentication for all roles which meets the

35

1 36531/RRT/S850

requirements of FIPS 140-1, level 3, in the area of roles and services.

5

In one embodiment of the present invention, the cryptographic module is implemented within an IBM 4758 cryptographic Coprocessor to securely print VBIs. The IBM 4758 to provides a set of cryptographic hardware and software within a protective enclosure that could be customized through additional software development. The IBM 4758 specification is described in "Building a High-Performance, Programmable Secure Coprocessor," S.W. Smith and S. Weingart, IBM T.J. Watson Research Center, Febraury 17, 1998; and "IBM 4758 Cryptographic Coprocessor Specification," available on IBM's website (www.IBM.com), the contents of which are hereby incorporated by reference herein.

20

The module's software is divided into four separately controlled layers. Software layers zero and one allow the module to initialize itself after power up, run self-tests, and include functions to cryptographically authenticate software loaded into layers two and three. The 4758 module, including the software of layer zero and one, has received a Security Level 4 certificate from NIST. In this embodiment, the present invention is implemented by developing a new and proprietary crypto service and postal application software for installation in layer three.

25

FIPS 140-1 cryptographic security requirements are graded into four levels of increasing security and assurance. At the transaction server, SSL cryptographic functions may be implemented with software at security level 1, or may employ a cryptographic module to achieve a greater level of security. For the cryptographic module of the present invention, security level 3 requirements are specified for each of the applicable FIPS 140-1 security areas, except Physical Security, which is specified

35

1 36531/RRT/S850

as level 4. The following are brief descriptions of level 3 and level 4 security principles.

5

Level 3 provides for identity-based authentication, which is stronger than the role-based authentication used in level 2. The module need to authenticate the identity of an operator and verify that the identified operator is authorized to assume a specific role and perform a corresponding set of services.

10

Level 3 also provides stronger requirements for entering and outputting critical security parameters. The data ports used for critical security parameters need to be physically separated or logically distinct from other data ports. Furthermore, the parameters need to either be entered into or output from the module in encrypted form, in which case they may travel through enclosing or intervening systems, or be directly entered into or output from the module (without passing through enclosing or intervening systems) using split knowledge procedures.

20

Level 3 allows software cryptography in multi-user, timeshared systems when a trusted operating system is employed along with a trusted path for the entry and output of critical security parameters. A trusted operating system with a trusted path would have the capability to protect cryptographic software and critical security parameters from other untrusted software that may run on the system. Such a system could prevent plaintext from being mixed with ciphertext, and it could prevent the unintentional transmission of plaintext keys.

25  
30

Security level 4 provides the highest level of security. Level 4 physical security provides an envelope of protection around the cryptographic module. Whereas, the tamper detection circuits of lower level modules may be bypassed, the intent of level 4 protection is to detect a penetration of the device from any direction. For example, if one attempts to cut through the

35

1 36531/RRT/S850

enclosure of the cryptographic module, the attempt is detected and all critical security parameters are preferably zeroized.  
5 Level 4 devices are particularly useful for operation in a physically unprotected environment where an intruder could possibly tamper with the device.

Level 4 also protects a module against a compromise of its security due to environmental conditions or fluctuations outside  
10 of the module's normal operating ranges for voltage and temperature. Intentional excursions beyond the normal operating ranges could be used to thwart a module's defense during an attack. A module is required to either include special environmental protection features designed to detect fluctuations  
15 or to undergo rigorous environmental failure testing that provides a reasonable assurance that the module will not be affected by fluctuations outside of the normal operating range in a manner that can compromise the security of the module.

The cryptographic modules are capable of being used in a  
20 multi-node server based environment. When the transaction server receives a request that requires module services, it gathers all data required to perform the service and inputs it to a module as part of a module command. Depending on the service requested, the module may generate outputs such as a message to the provider  
25 infrastructure, a message to the client, or an updated PSD package to be stored by the database server. The transaction server acts on these module outputs to continue the transaction sequence by relaying messages to the provider, the client, or the database. Although the server directs the system's operation,  
30 the modules and other cryptographic elements of the system maintain the integrity of data flowing through the system without relying on the server's software.

Each of the cryptographic modules of the present invention is capable of performing Key management, whether the module  
35 implements a secret key (symmetric) algorithm or a public key

(asymmetric) algorithm. Secret keys and private keys are protected from unauthorized disclosure, modification or substitution. Public keys are protected against unauthorized modification or substitution. Detailed key management requirements are defined in FIPS 140-1, the contents of which is incorporated by reference herein. Cryptographic key management is typically concerned with the entire life cycle of the cryptographic keys employed within a cryptographic-based security system, including their generation, distribution, entry, use, storage, archiving and destruction.

FIPS 140-1 allows key generation for a cryptographic module to be done either inside the module or outside the module and then loaded into the module. Because the postage server uses many identical modules to perform the PSD functions, certain keys are generated and distributed to the other identical modules. All keys are generated using FIPS approved key generation algorithms, for example the following FIPS approved Standards, the contents of which are hereby incorporated by reference herein.

FIPS PUB 46-2: Data Encryption Standard (DES)  
 FIPS PUB 46-3: Requirements for 3DES  
 FIPS PUB 112: Password Usage  
 FIPS PUB180-1: Secure Hash Standard (SHA-1)  
 FIPS PUB 186: Digital Signature Standard  
 ANSI X9.52-1998 Triple Data Encryption Algorithm Modes of Operation

PKCS#1:RSA (1024 bits)  
 PKCS#3: Anonymous Diffie-Hellman.

Each module provides key management support for keys that are used for user data protection. The module is used for the management of a large number of postage meters. Presumably, this number may be too large for (permanent) storage inside the modules. Therefore, all data pertaining to postage meters is

stored external to the modules. This necessitates security mechanisms guarded by the module to maintain authenticity and confidentiality of this meter data. In addition, load balancing requires the sharing of the load between multiple modules. Finally, it is not feasible to predict which module will be processing a certain meter. This leads to the following features:

- 10 • Each module supports confidentiality (encryption) and authentication of user data sets when stored outside the module. These keys used for this are called the Master Encryption Key (MEK) and the Master Authentication Key (MAK), respectively.
- 15 • Each module supports encryption and authentication of the key token format: DES (sccDES\_Key\_t), DSA (sccDSAKeyToken\_t) and RSA (sccRSAKeyToken\_t), and preferably also generic support for arbitrary-length key data buffers.
- Each module supports generation of Master Keys (MEK and MAK) using the module's hardware-based RNG. Encryption meets FIPS 46-3 requirements for 3DES.
- 20 • Each module provides a backup strategy for Master Keys that maintains security with guaranteed availability under all reasonable circumstances.
- 25 • Each module supports activation and de-activation of Master Keys.
- Each module supports rollover from one Master Key Set (MEK and MAK) to another set. This implies support for two Master Key Sets, a active one, and a dormant one. In addition, each module provides translation of data protected under one of these sets to protection under the other set.
- 30 • Each module supports deletion of a (dormant) MKS. This is required in case of compromise of an MKS.

Decryption of the data set and verification of its authenticity by another module different than the one that created the encrypted data set is also possible. This implies the requirement of sharing (cloning) of the decryption and authentication keys between modules.

- Export of a Master Key Set (MKS) to another module.
- Import of an MKS from another module.
- 10 • Export and Import of an MKS is encrypted and authenticated.
- Import and export is under dual control; at least 3 users should be involved.
- The module that exports an MKS determines whether this MKS is exportable from the importing module.

15 A MKS is generated in the master module. The master module can export an MKS to other modules, in shares, each encrypted under the destination module's Transport Public Key. This process requires prior export of the Transport Public Key from the destination module by a Key Custodian, and provision of that key to the master as an input parameter to the Export Share command. The generation of the Transport Key Pair is done in Initializing state; this command transitions to Importing Shares state. The export of the Transport Public Key is done in Operational or Importing Shares state; the actual import of the MKS is preferably done in Importing Shares state.

25 The Transport Private Key is a retained key; it can not be exported outside the module it was generated in. This ensures that export of an MKS always is destined for one well-determined module. Generation of a Transport Key Pair only in Initializing state ensures that a module has only one Transport Key Pair in its lifetime; a Reset is required to return to Initializing state. Moreover, transition from Initializing to Importing Shares state upon generation of the Transport Key means that any module should have an MKS when in Operational state.

1 36531/RRT/S850

A MKS can be exported as an exportable MKS or as a retained MKS. This is a property of the exported key itself; the destination module respects this distinction. An exportable MKS can be exported in the same way as the master exports its internally generated key. A retained key cannot be exported (attempted export of a retained MKS will fail). This architecture allows for limitation of the number of modules with an exportable MKS. Unless all of these modules have to be reset, one can always create additional modules with the same MKS. At the same time, there can be fairly tight control over the (few) modules with an exportable MKS.

In case all exportable copies of an MKS are lost (all modules containing an exportable copy are reset or lost) one can still continue processing with any modules that are still operational. Next, one can create a new MKS (possibly in a new master) and export that to all operational modules. These modules then can roll over to the new key. Subsequently, one can add new modules with this new MKS, like before.

Preferably, all operational modules can be brought back to operational state with the proper MKS as long as at least one exportable copy of this MKS exists. If all exportable copies are lost, one could just continue operating with any remaining operational copies, generate a new MKS in the master (possibly a new module) and roll over to that new MKS in the operational modules. Subsequently, one can create new modules with that MKS, just like before.

This implies that no special backup procedures are required; the cloning procedures and the fact that all exportable copies of an MKS act as each other's backup copy are sufficient to maintain availability under all circumstances that can reasonably expected to occur.

To maximize the probability that at least one exportable copy of the MKS is always available, an additional MKS backup



1 36531/RRT/S850

copy can be created by reserving a separate (non-operational) module for its storage. To avoid existence of an operational  
5 module without attendance, the import of the MKS is preferably only done when the backup copy is needed. Preferably, the export is done in an  $n$ -out-of- $m$ - secret sharing scheme (Shamir).

In the descriptions below for losing keys, the backup shares together with the backup module are considered to constitute an  
10 exportable MKS. Note that the backup module use requires prior import of  $n$  of the  $m$  shares.

If no exportable copies of the MKS are lost, no capabilities are lost, just operational capacity (bandwidth). This allows a quick return to full capacity in case a module is lost (see  
15 below), as well as increase of capacity, since the MKS can be exported to a new module.

The recovery procedure is repeated for each of the modules that have lost the MKS.

For a new module or if the transport key is also lost:  
20 reset (or replace) the operational module and generate a new Transport Key Pair in Initializing state;  
export the Transport Public Key from the destination module;  
export encrypted shares of the MKS (for this Transport  
25 Public Key) from the source module;  
import the encrypted MKS to the destination module;  
activate the MKS in the destination module.

If some (but not all) exportable copies of the MKS are lost, the remaining copies can still export, therefore, no capabilities  
30 are lost. (Some capacity may be lost) This allows a quick return to full capacity by restoring the MKS in all modules that lost it (or in their replacement).

If the only remaining exportable MKS is the backup copy, first import  $n$  of the backup shares into the backup module. This  
35 module now is a normal module with an exportable MKS, so the

1 36531/RRT/S850

remainder of the procedure is the same as described above. In this case, all operational modules can continue operating with the current MKS. The only capability lost in this case is export of the MKS, and therefore the addition of new modules.

The Recovery procedure is as follow:

Reset (or replace) the master;

Generate a new MKS in Initializing state;

10 For each module that is still operational:

Import this module's Transport Public Key;

Export the new MKS from the new master, encrypted under this Transport Public Key. If the destination module contains a retained copy of the old MKS, the exported MKS should be a retained copy, else it may be an exportable MKS;

15 Import the new MKS into the operational module;

Translate the protection of all data from the old MKS to the new MKS;

20 Activate the new MKS in each of the operational modules.

This returns the system to a state equivalent to that before loss of all exportable copies of the MKS. In particular, new capacity can now be added again. However, during this recovery, the system has a reduced capacity (only modules that are still operational are running).

25 All keys involved in session key management (ephemeral DH keys, session master keys and transaction keys) are maintained by session management (described below). Local keys are used for encryption of sensitive data stored in persistent memory, to avoid exposure in case of tampering. One mechanism chosen for this is the PPD read/write mechanism for the memory (sccSavePPD and sccGetPPD) where the encryption keys are stored in NVM (which is cleared on tamper). The key management is internal to the module.

35

1 36531/RRT/S850

Key management services related to cloning and management of the MKS include:

- 5       • The Key Management Services module interface function
- Generate MKS
- Generate Transport Public Key (TPK)
- Export Transport Public Key
- Create MKS Shares
- 10       • Export MKS Share
- Leave Exporting Shares state
- Start Importing MKS (transition to Importing Shares state)
- Import MKS Share
- 15       • Combine MKS Shares
- Activate MKS (deactivates old MKS, if any, and activates a new one)
- Delete the dormant MKS
- Encryption and/or MAC Translation (decrypt and verify
- 20       MAC under old MKS; compute MAC and re-encrypt under new MKS)

Usage of the MKS include:

- Compute MAC and Encrypt
- Decrypt and verify MAC
- 25       • Compute MAC
- Verify MAC

The following two keys are generated by a module when the start initialization command is executed. These keys are not shared with other modules.

- 30       • ASK, audit signing key. This is a 1024-bit DSA key used to sign entries in an audit log.
- Audit Verification Public Key. This key is output from the module and will be used to authenticate the audit record log.

35

1 36531/RRT/S850

The following two keys are generated by a Master cryptographic module when the MKS command is executed.

- 5 • MEK, the master encrypting key. This is a triple-DES key used by the module to encrypt all external key tokens for keys that are generated by the modules.
- MAK, the master authentication key. This is preferably an 8-byte key used to generate a DES MAC for key tokens
- 10 encrypted by the MEK.

The following two keys are generated by the modules that are not Masters when the generated transport key command is executed.

- V\_TPK, Transport Private Key. This is an RSA key used by a non-master module to decrypt the imported MKS key.
- 15 • U\_TPK, Transport Public Key. This is an RSA key used by a master module to encrypt an MKS key that will be distributed to another module.

The module's system software (CP/Q++) generates the following key during CP/Q++ initialization.

- 20 • PPD key. This is a DESkey generated by the CP/Q++ and used to encrypt keys that are stored in the module's flash memory. The key is not accessible outside the system software.

25 The module generates the following keys for use during secure sessions with the host computer.

- Session Master Keys. This is a set of two keys, generated for a given secure session, used to derive session transaction keys. One key is for authentication (DES MAC computation) and the other for security (Triple-DES encryption). The keys are destroyed at the conclusion of the secure session.
- 30

- Session Transaction Keys. These keys are used for a single transaction during a secure session. They are derived by
- 35

1 36531/RRT/S850

a one-way function of the Session Master Keys combined with a transaction counter.

5 The following five keys are generated by a module when the initialize crypto-card command is executed.

- VDSK\_ipost, the DSA private key used by the modules to sign challenges during client registration. The key is output in a key token for distribution to other modules.
- 10 • UDSK\_ipost, the DSA public key that is imbedded in the client application software and is used to authenticate challenges signed by the module during client registration. The key is output from the module after generation.
- 15 • VRSK\_ipost, the RSA private key used by the modules to decrypt client secrets transmitted to the modules during client registration. The key is output in a key token for distribution to other modules.
- URSK\_ipost, the RSA public key that is imbedded in the client application software and is used to encrypt client secrets transmitted to the module during client registration. The key is output from the module after generation.
- 20 • MK\_chkpt, the DES MAC key used to authenticate a checkpoint database record when it is returned to a module from the database. This key is derived from VDSK\_ipost by hashing it using SHA-1 each time that VDSK\_ipost is imported by the module.
- 25

30 The following keys are generated by a module at the time that a PSD package, the database record containing a postage meter's data, is created.

- V\_psd, the DSA private key used to sign indicia created by this VBI meter. This key is stored in the meter's PSD package as a key token, encrypted by the MEK.
- 35

1 36531/RRT/S850

- U\_psd, the DSA public key used to authenticate the signature on indicia created by this VBI meter. This key is output from the module to the provider after generation.
- MK\_psd, the DES MAC key used to authenticate a PSD package when it is returned to a module from the database. This key is derived from V\_psd by hashing it using SHA-1 each time that V\_psd is imported by the module.
- EDEK\_psd, the 3DES key-encrypting-key used to encrypt the client secrets transmitted to the module during client registration. This key is stored in the client's PSD package as a key token, encrypted by the MEK.

15 FIPS 140-1 allows key distribution to be performed by manual methods, automated methods, or a combination of automated and manual methods. Keys are input to a module when required to initialize the module and to initialize the PSD packages of each meter. These key transfers are not considered key distribution.

20 Also, FIPS 140-1 allows key entry and output procedures to differ depending upon the key distribution technique employed. The cryptographic module does not implement manual key entry. All secret or private keys are input to or output from the module electronically and are encrypted.

25 The system of the present invention utilizes a plurality of cryptographic modules that need to work in concert. This entails creating a shared secret for all the modules. In one embodiment, key entry is required to initialize a new clone module for service at the service provider's facility. Preferably, only one

30 module functions as a master module. The master module generate a Master Key Set (MKS). The exporting of the shares of the MKS keys requires dual control. The Security Officer should first issue a create MKS shares command to specify the number of shares to be created and to authorize the export of the shares.

35

1 36531/RRT/S850

In one embodiment, the module uses a Pseudo-Random Number Generator (PNRG) to generate the MKS, which contains two distinct  
5 keys:

1. Master Encryption Key (MEK): A 3DES key used to encrypt keys when stored outside the module.
2. Master Authentication Key (MAK): This is a key used to  
10 compute the DES MAC for signing keys when stored outside of the module.

The MKS is stored in a non-volatile memory (NVM) within the module.

When the required number of shares are input to a module,  
15 a Key Management Officer can then enter an export share command to export one of the MKS shares. Input as part of the export share command is the transport public key of the new module being cloned. This public key is used to encrypt each key share before  
20 it is exported and stored on a storage medium such as a floppy disk, a CDROM, or the like. After the last share is exported, the Master module returns to the operational state and will no longer output key shares.

For the modules that are not masters, the Security Officer  
25 uses the generate transport key command to request the module to generate the transport key pair. This command also establishes that the module is not a master module. The transport public key is output for use by a Key Management Officer when exporting MKS key shares from a Master module. To input MKS shares to a  
30 module, the Security Officer must send the start importing shares command to the destination module. Key Management Officers can then enter their shares from their floppy disks, CDROMs, or the like until all have been entered. The destination module uses its transport private key to decrypt the key shares. The process  
35 is completed when the Security Officer sends the combine shares command.

1 36531/RRT/S850

The MKS is used to generate external key tokens by MACing the key with the MAK and Triple-DES encrypting it with the MEK.  
5 After a new module has been loaded with the MKS, the Security Officer can use the initialize crypto-card command to export key tokens from the module or to load it with key tokens generated by another module.

10 In one embodiment for secure printing of postage values, the following four keys are input to a module using the initialize crypto-card command.

- VDSK\_ipost, the DSA private key used by modules to sign challenges during client registration.
- 15 • VRSK\_ipost, the RSA private key used by modules to decrypt client secrets transmitted to the module during client registration.
- U\_ca, the USPS Certificate Authority's X.509 certificate.
- 20 • UDSK\_auth, the DSA public key used to authenticate signatures on messages from the provider infrastructure.

At the time of customer registration, the key URSK\_ipost, embedded in the client computer cryptographic software is used to encrypt client secrets before transmitting them to the module. These secrets include:

- HMK, the client's MACing key. The key is used to generate a DES MAC for mutual authentication of messages between the client and the module.
- 30 • PW, the hash of the customer's passphrase. The hash of the passphrase is used to authenticate the customer to the module if the client's copy of HMK is lost.

35



1 36531/RRT/S850

The module uses the private key VRSK-ipost to decrypt these client secrets before storing them as an encrypted\_key token in the meter's PSD package.

Within the module, the permanently stored secret keys are stored in designated NVM locations that serve to adequately identify their function. Secret and private keys that are stored outside the module as part of a PSD package are contained in key tokens. Key tokens are data structures that identify the keys and include other information relevant to the keys. The key tokens are authenticated by the MAK and encrypted by the MEK. When these keys are inside the module they are stored in designated locations in volatile memory.

The cryptographic module of the present invention provides the capability to zeroize all plaintext cryptographic keys and other unprotected critical security parameters within the module. For example, the IBM 4758 stores all plain text keys and other SRDI's in BBRAM (NVM). Zeroization of all BBRAM contents occurs if the module's tamper detection envelope senses intrusion. A system user can also destroy these SRID's by disconnecting the external batteries that provide backup power to the module. These features allow the 4758 to meet FIPS 140-1 requirements. FIPS 140-1 allows for a cryptographic module to output encrypted keys for archiving purposes. In one embodiment, each module implements key archiving mechanisms.

A state machine determines the availability of module commands in conjunction with the roles that a user takes up. In other words, the state and the current user role together provide sufficient information to decide whether an action is allowed or not. Most commands require authentication for transport from the host to the module. Therefore, an active session is derived requirement for execution of these commands. This requirement

1 36531/RRT/S850

is explicitly verified by these commands, however.

5 Invalid data may lead to failure of execution. However,  
verification of validity is considered the first step in  
execution. The decision to start execution depends on the state  
and the user role alone; validity of input data does not play a  
role in that decision. The complete module state or the state  
10 of any module application may be composed of the module state as  
described in this document, complemented with other state  
information maintained by other libraries. Exemplary states are  
described below.

15 Uninitialized state. This is the initial, state that the  
module is in immediately after loading the code and  
booting. No security related data has been loaded. The  
only available command is the Start Initializing command.

20 Initializing state is the state that the module is in  
during the initialization process. In this state, the  
access control database is initialized and the MKS is  
generated or its import is initiated. The module exits  
this state when an MKS is generated (next state:  
operational) or when a Transport Key Pair is generated  
25 (next state: importing shares).

Operational state. In this state, all normal operational  
commands can be executed. Depending on the user role(s)  
these can be administrative (change password), postage  
meter related, session management or auditing commands. In  
30 addition, certain key management commands (activation of a  
new MKS and deletion of a dormant MKS) are available.  
Finally, special commands transition to other states  
(administrative, exporting shares, importing shares) for  
special restricted commands.  
35

1 36531/RRT/S850

Administrative state. This state includes all access control maintenance commands, such as adding, deleting, viewing and modifying user accounts. The module enters this state from Operational state when a Security Officer issues the Begin Admin command in operational state. It remains in this state until the Security Officer issues the End Admin command (next state: operational).

10 Exporting Shares state. This state allows the Key Custodians to export shares of the MKS. The module enters this state from operational state when a Security Officer issues the Create MKS Shares command. It remains in this state until all shares have been exported (via the Export MKS Share command) or the Abort Export command is issued (in both cases, the next state is operational). If the Abort Export command is issued before all shares are exported, the exported shares may be useless.

20 Importing Shares state. This state accepts the import of shares of the MKS. The module enters this state from operational state when a Security Officer issues a Start Importing MKS command. It remains in this state until a Combine Shares command is issued (next state: operational if an MKS exists after completion, else error).

25 Error state The coprocessor enters this state on (fatal) errors. Depending on the severity of the error, it should be cleared by rebooting, or the coprocessor should be reset (next state: uninitialized). Only audit entry creation and session commands are possible in this state.

35 FIG. 6 illustrates an exemplary finite state machine. The logon and logoff functions, session management commands, access control queries, and audit entry creation are available in all states except uninitialized and error.

1 36531/RRT/S850

Within any thread in the module, it is not possible to interrupt processing, and to resume processing at another instruction than where it was interrupted. The only exception to this rule is rebooting. Rebooting interrupts processing, and starts at a given fixed location in the application.

10 In one embodiment, two variables hold the current state information: Current State and Persistent State. The latter is stored in NVM. This allows for atomic state transitions and for retaining state information across rebooting. Atomic state transitions can be implemented by first updating Current State, then performing all required actions, and finally updating Persistent State. If the module is rebooted during this sequence, the old state is retained in Persistent State. Thus, 15 if Persistent State has been updated, one is assured that the full transaction has been executed. In addition, it can be used to retain Error state information as required.

20 Before executing any function, the module verifies whether a reboot has occurred by checking a boot detection flag in the NVM. A reboot clears NVM, thus also clearing this flag. Therefore, the first call to the module after a boot will find this flag cleared. After performing any required initialization, 25 the flag can be set.

Initialization includes the following boot detection. When the reboot flag is found set, no action is taken. When the reboot flag is found cleared, the value of the Persistent State variable is examined, and the following is done. 30

If it is Error: a fatal error has occurred, and Current State is set to Error.

35 If it is Initializing: Persistent and Current State are set to Error, as this is a fatal error.

1 36531/RRT/S850

5 If it is Importing Shares, and if there is no active MKS, Persistent and Current State are set to Error, as this is a fatal error. (If the module contains a valid active MKS, both Current State and Persistent State are set to Operational, see below.)

10 If it is Exporting Shares: Current State is set to Error, as this is a non-fatal error.

If it is Uninitialized: no successful initialization has been performed and Current State is set to Uninitialized.

15 If it is Importing Shares, and if the module contains a valid active MKS, both Current State and Persistent State are set to Operational.

Else: both Current State and Persistent State are set to Operational.

20 Unless specified otherwise, all state transitions mentioned in this document are performed by first updating Current State, and then updating Persistent State. Atomic actions are enclosed within such a state transition.

25 The module is in Uninitialized state immediately after loading all software and booting. In the Uninitialized state, no commands can be accepted, except the "Start Initialization" command. This command erases all non-volatile memory. This erases all data and keys present in the module, in particular the  
30 Master Keys and the access control database; set the internal module clock; creates the Audit Signing Key; creates the first audit entry, capturing this event; and transitions to the Initializing state.

35 Preferably, the only way to return to Uninitialized state is to reset the module. This together with the fact that

1 36531/RRT/S850

perform the generation respectively and prepare the import (by  
generating the import encryption key pair). In summary, the  
5 Initializing state serves to initialize the module and the  
sharing of the MKS. These initializations are one-time  
activities; the former mainly because there is no need to repeat  
it; the latter because it is not allowed to happen repeatedly.

All normal, operational commands are executed in Operational  
10 state. That is, Operational state contains commands implementing  
all actions not related to initialization of a module, the  
maintenance of the access control database, or key management  
(with the exception of key usage). The following are examples  
of commands in Operational state associated with different  
15 functions.

- Access Control

- Begin Admin (transition to Administrative state).

20 Logon

- Logoff

- Query Current User Role

25 Query Current User ID

- View Access control database

- Change password

30 Set clock

- Get Status

- Session Management

35 Open Session

1 36531/RRT/S850

Close Session

5 Compute Session MAC

Verify Session MAC

Session Encrypt

10 Session Decrypt

- Key Management

Key management related to cloning and management of the MKS:

15 Export Transport Public Key

Start Importing MKS (transition to Importing Shares state)

20 Create MKS Shares (transition to Exporting Shares state)

Generate MKS

25 Activate MKS (deactivates old MKS, if any, and activates a new one)

Delete dormant MKS

Usage of the MKS:

30 Global Encrypt and MAC

Global Decrypt and MAC

Compute MAC

35 Verify MAC

1 36531/RRT/S850

MKS Rollover:

5 Encryption and MAC Translation (decrypt and  
verify MAC under old MKS; compute MAC and re-  
encrypt under new MKS)

- Audit Support

10 Audit Entry creation

Audit Key Creation

Export of the Audit Verification Key

15 All administrative commands supporting access control are  
executed in Administrative state. That is, Administrative state  
contains commands implementing:

- Creation of an account
- 20 • Deletion of an account
- Modification of an account
- Viewing the access control database. This command  
25 lists all users and their roles, account expiration,  
last access, but not the user passwords.
- End Admin (transition back to Operational state).
- Logon
- 30 • Logoff
- Query Current User Role
- Query Current User ID
- 35 • Set clock



1 36531/RRT/S850

- Get Status
- 5 • All session management commands
- Audit entry creation.

Preferably, all these commands (except session key usage) are audited.

10 As shown in FIG. 6, Administrative state is entered by the Start Admin command, issued by a Security Officer. The administrative commands in Administrative state require Administrator user role. This separation of roles ensures dual control. Secondly, the transition to administrative state will  
15 ensure that no operational commands can be issued by the Administrator (separation of duties).

The Exporting Shares state exports encrypted shares of a Master Key Set. When the last share in a secret sharing scheme  
20 is exported, the module transitions to operational state. All these commands are audited. (Audit entry creation.) Only an exportable MKS can be exported this way (i.e., internally generated or imported as exportable; by default an imported MKS is a retained key). The export is initiated by a Security  
25 Officer issuing the Create MKS Shares command in Operational state. This command changes state to Exporting Shares. The actual export of the encrypted shares is done through the Export Share command, issued by a Key Custodian. Encryption of the  
30 shares is under the Transport Public Key. This key is provided by the Key Custodian as an input parameter to the Export Shares command. Rebooting while in Exporting Shares state may be a fatal error.

The following commands are available in the Exporting Shares  
35 state.

1 36531/RRT/S850

- Logon
- 5 • Logoff
- Query Current User Role
- Query Current User ID
- 10 • Export Share
- Abort Export
- Get Status
- 15 • All Session Management commands
- Audit entry creation.

In the Importing Shares state, a module imports encrypted shares of an MKS. The encryption is done under the Transport  
20 Key. Importing shares state is entered by Issuing the Start Importing MKS command. The actual import is performed by repeating the Import Share command as required. Combination of the shares to a MKS transitions to Operational state is also possible. All these commands are audited. (Audit entry  
25 creation.

The following commands are available in the Importing Shares state.

- 30 • Logon
- Logoff
- Query Current User Role
- 35 • Query Current User ID

1 36531/RRT/S850

- Export Transport Public Key
- 5 • Import Share
- Combine Shares
- Get Status
- 10 • All Session Management commands
- Audit entry creation.

In Error state, no cryptographic operations may be performed. Thus, the only commands available in the Error state  
15 are Get Status, Access Control Queries. A reset erases all NVM and changes to Uninitialized state. Fatal errors set both Persistent State and Current State to Error. This ensures that rebooting will not clear the error. Therefore, the only way to clear fatal errors is a Reset command, or by a complete re-  
20 initialization of the module by other means (both methods change state to Uninitialized). Non-fatal errors only set Current State to Error; the Persistent State is not modified. A subsequent reboot clears the error, unless a boot error occurs. All Module command requests in Error state, with the exception of Get  
25 Status, return an error and do not output any data. Error states are preferably non-fatal, with the following exceptions (i.e. these only set Current State to Error):

failure in Audit Entry Creation which doesn't breaks the  
30 audit chain; and

detection of Exporting Shares state during boot-up

Throughout the lifecycle of a module, its software keeps track of the module's present operational state and allows only the operations that are allowed for these module states. Each  
35 PSD package also contains information to define its present

1 36531/RRT/S850

operational state. When the module is loaded with a PSD's package, module software will only perform operations that are allowed for the present state of that PSD. The following paragraphs describe the states of the module and the PSD package throughout their operating life.

When the module is first operated after its software is loaded, it starts in the uninitialized state. Preferably, the only command that it will accept is the start initialization command and the start initialization command will only be executed if the module is in the uninitialized state. During this phase of life, the Module is not considered to be a crypto module and no authentication is required to issue this command. The start initialization command first erases all non-volatile memory to destroy any cryptographic keys or access account database entries that may persist from previous use of the module. When memory erasure is completed, the module transitions to the initializing state.

The Initialized state includes commands that can be executed only once in the life of the module. Because this state can only be entered from the uninitialized state, an existing module cannot be modified by using these commands. Within this state the access account database is initialized. If a master module is being created, the master key set (MKS) is generated and the operational state is entered. If the module is not a master, the transport key pair is generated and the Importing shares state is entered.

Preferably, the module Exporting Shares state can only be entered from the Operational state. Once the master module generates the MKS it can export it to another module. In one embodiment, this is accomplished by using an n of m Shamir secret sharing technique, as follows:

1. A target (clone) module is initialized, following the

steps described above.

5 2. The Security Officer logs on to the newly initialized target Module and issues a command to generate a transport key pair (TPK). The TPK is a RSA public key used for transporting an MKS previously generated by the master module. The private portion of the TPK is retained in the new module and can never be exported from the module that  
10 generated it. This control ensures that MKS export is always destined for one well-determined target module. The public portion of the TPK is saved on to a floppy disk, a CDROM, or the like.

15 3. The public portion of the TPK is saved onto a storage medium such as a floppy, CDROM, or the like and physically carried over to the machine housing the master module. The Security Officer logs on to the master module and issues the create MKS shares command. The create MKS shares  
20 command accepts two arguments: (1) the number of shares to be created (n, one share per key custodian) and (2) the threshold number of shares required to recombine the shares. A successful create MKS command results in n number of shares, where n is greater than or equal to 2.

25 4. A Key Custodian logs in and initiates the export MKS shares command on the master Module and chooses whether the exported key pair should be an exportable or retained key pair for the destination module. An exportable key pair permits the destination module to export key shares in the  
30 same manner as the original master module. With a retained key pair, the new cloned module cannot export key shares to other cryptographic modules. The export MKS shares command validates the current key custodian and then encrypts an MKS share with the TPK. The TPK-encrypted share is saved  
35 to a floppy, a CDROM, or the like. This procedure is

1 36531/RRT/S850

repeated for each key custodian specified in step 3, above.

5 The module Importing Shares State can be entered from the  
Initializing state (to load the MKS for the first time) or from  
the Operational state (to load a replacement MKS). The following  
describe in more detail the importation of the MKS key shares for  
generation of the master key set in a module. Once the master  
Module encrypts the MKS shares and saves them to floppies, the  
10 shares can be imported into the target module.

1. The Security Officer logs into the target module and  
initiates the start importing MKS shares command.
2. The first Key Custodian inserts their MKS share floppy  
15 or CDRom, logs in, and issues the import MKS share command.  
The target module reads in the first share. This procedure  
is repeated for each Key Custodian.

When the final Key Custodian has finished entering the key  
share, the Security Officer logs in and issues the combine MKS  
20 shares command. The combine MKS shares command causes the target  
module to unencrypt each share and combine them to create the  
MKS. The shares are destroyed following this procedure. The MKS  
is stored in the NVM as described above.

25 Once in the Operational state, the module is capable of  
completing its remaining initialization steps. The security  
officer sends an initialize crypto-card command to load all other  
required module shared keys (These are described in the Key  
Management section). The administrator can enter the access  
30 control data for all other personnel that require authenticated  
role access to the module.

When the module is initialized, it does not become a PSD  
until PSD packages are created. A PSD package is created using  
the initialize PSD command. This creates a data structure that  
35 contains the PSD package data elements. One data element is the

1 36531/RRT/S850

present state of the PSD. The module will only allow the PSD to perform operations that are allowed for its present state. When  
5 the initialize PSD process is completed, the PSD state changes to the raw state.

In one embodiment, the PSD package for each meter user contains all data needed to restore the meter's PSD to its last known state when it is next loaded into a module. This includes  
10 the items that the IBIP Performance Criteria specifies to be stored inside the PSD, information required to return the PSD to a valid state when the record is reloaded from the database, and data needed for record security and administrative purposes. In this embodiment, the PSD package includes the following items:

- 15 • Ascending and descending registers
- Device ID
- Indicia key certificate serial number
- 20 • Licensing ZIP code
- Key token for the indicia signing key
- The user secrets, (the client DES MAC key and the SHA-1 hash of the client's passphrase).
- 25 • Key token for EDEK\_psd, the key for encrypting user secrets
- Data needed to maintain operating continuity includes:
  - Date and time of the last PSD transaction
  - The last challenge received from the client
- 30 • The operational state of the PSD (leased, withdrawn, etc.)
- Expiration dates for keys
- The passphrase repetition list (eliminates reuse of recent passphrases)

35 The IBIP Performance Criteria specifies that the PSD should

1 36531/RRT/S850

store the public key certificate for the USPS CA. Because all meters require this information, it serves no purpose to repeat  
5 this data in each PSD package. Instead, the certificate for the USPS CA public key is stored in the memory of all the modules.

The following describes the PSD package states.

- 10 • Raw state. As a result of initialization the meter serial number is assigned, the postal registers are set to zero, the PSD keys are generated, and all other initializing steps are performed. The provider receives the PSD public key and device ID needed to obtain the PSD's public key certificate. Preferably, the only command that can be  
15 executed while in the raw state is the authorize PSD command.
- 20 • Unleased state. The authorize PSD command loads the PSD public key certificate and changes the PSD state from raw to the unleased state. Preferably, the only command that can be executed while in the unleased state is the configure PSD command.
- 25 • Assigned state. The configure PSD command assigns the PSD to a customer, allows entry of the customer shared secrets, and places the PSD in the assigned state . When the customer's postal license is issued, the authorize customer command enters the customer's originating zip code and places the PSD in the leased state.
- 30 • Leased state. Once in the leased state the PSD is ready for the customer to use. The meter can begin printing indicia once the first postage value download had been completed.
- Password Reset state. This is a temporary state to allow a lost password to be replaced.
- 35 • Withdrawn state. The user's account has been closed or



1 36531/RRT/S850

suspended. This state is entered from the leased state or  
pwreset state by executing the create refund indicium  
5 command. The PSD package remains in the database where it  
can be accessed by the server but after entering the  
withdrawn state the Module will no longer execute any PSD  
command when loaded with this PSD package.

The PSD packages are stored outside the modules when not  
10 being used and the module is able to detect when record storage  
problems have occurred. In one embodiment, a Redundant Array of  
Independent Disks (RAID) and a database server are used together  
to provide reliable operation of the database. Multiple copies  
of each record are maintained and a locking system is used to  
15 prevent more than one postal server from simultaneously accessing  
one meter's PSD package. If a partial failure of the RAID  
occurs, the system transparently switches to backup records.

In one embodiment, the cryptographic modules store up to  
20 five transactions in a respective internal register. The number  
of transactions compared in the verification process system may  
be set by the system administrator. A verification process  
compares a predetermined number of last transactions. The  
database subsystem stores a table that preferably includes the  
25 module(s) present in the Postal Server subsystem, the module  
serial numbers, the time of the last transaction the module  
processed, the date of the last transaction the module processed  
and the value of the last transaction the cryptographic module  
processed. Other values related to a transaction and a module

30

35

1 36531/RRT/S850

can also be saved for verification purposes. An example of the module table, where the Postal Server subsystem has four modules, is illustrated below.

Cryptographic module	Cryptographic module Serial. #	Transaction Time	Transaction Date	Transaction Value
1	34576590	11:53 PM	08/06/99	\$ 0.33
2	34582152	07:30 AM	08/05/99	\$ 7.55
3	34593104	03:00 PM	08/02/99	\$ 3.45
4	34593992	11:22 AM	08/03/99	\$ 5.78

When a cryptographic module loads a new PSD out of the Database subsystem (performing a transaction), the module's register, containing the last transaction's time, date and value, is verified against that module's entry in the Database subsystem's module table. The time, date or value for each transaction stored in each module should match the corresponding values for the respective module stored in the database for the verification process to be successfully completed. Cryptographic modules do not load new PSD transactions unless the verification process has been successfully completed. If any of the compared values is found to be different, preferably the whole system shuts down until authorized personnel can investigate the situation. In one embodiment, the threshold in the system is adjustable so that the system may be set to shut down if one, two or more modules fail the verification process.

With the success of the authorization state, the client software not only trusts the cryptographic module, but also shares a common HMK with the cryptographic module, which it uses to sign and challenge each successive message. FIG. 5 is an exemplary embodiment illustrating client software and

1 36531/RRT/S850

cryptographic module (PSD) communication during the operational state. Client software 503 sends a new challenge message to  
5 cryptographic module 502, as shown by 501. The cryptographic module responds by signing the challenge with the shared HMK and then sends this ciphertext back to the client software, along with its own challenge, as shown by 504. Client software 503 compares the ciphertext of the challenge it originally sent to  
10 the cryptographic module, and also signs the message received from the cryptographic module.

If the signatures compare, the client software trusts the cryptographic module for this transaction. Client software 503 uses the cryptographic module challenge message to authenticate  
15 itself to cryptographic module 502. Client software 503 now sends the signed challenge that cryptographic module 502 had sent, with the addition of the client software local record of the user's AR and DR, as shown by 505.

The client software also sends a cleartext of the challenge and the transaction message, as shown by 506. Next, the client software sends a Hash Message Authentication Code (HMAC) for all of the data sent in 505 and 506, using shared HMK, as shown by 507. HMAC is a digital signature created using a hash algorithm with an arbitrary message and the secret key (HMK). The client  
25 software sends the original arbitrary message and the HMAC to Postal Server via the network. HMK, as the HMAC Key, stays in the client software 503. The cryptographic module 502 already has a copy of HMK because it was sent over to Postal Server during the user registration process. In another embodiment, Data Encryption Standard Message Authentication Code (DES MAC) is used instead of HMAC.  
30

In one embodiment, the checkpoint concept operates in the following manner. Each module retains in its memory records  
35 relating to the three most recent transactions that modified a

1 36531/RRT/S850

PSD package. For example, these records include the following data items:

- 5 • PSD meter ID
- Transaction type
- Transaction amount
- PSD AR value
- 10 • PSD DR value
- Module serial number
- Date/time stamp (for record replay detection)
- 15 • Module total amount reset
- Module total amount printed
- Module total amount refunded

The record of the most recent transaction is also output to the database and is protected from modification by a DES MAC generated using the key HMK\_chkpt. When a PSD transaction is to be performed, the checkpoint record from the database is input along with the PSD package for the meter. Preferably, all IBIP commands to the modules are handled by the function sdx\_dispatch. Within dispatch, the checkpoint record from the database is compared with the most recent checkpoint record stored in the module memory. If they match, it is highly likely that no switchover of the database (resulting in lost records) has occurred. The module then trusts that the PSD package is up to date and allows the IBIP command to be executed. When the IBIP command is completed, the checkpoint record is updated and output to the server for database storage along with the updated PSD package.

In the case of create indicium commands, the server first confirms that the updated records have been stored on the

1 36531/RRT/S850

database before the indicium is transmitted to the client for printing. (Server transaction logs keep a record of all messages sent to clients.) In the case of the provider commanding postage value download or create refund indicium, the server reports an error if the database fails to correctly store the updated checkpoint record and PSD package.

10 If the comparison of internal and external checkpoint records does not match, the module will not execute the IBIP command and an error code is returned to the server. The server then sends a command called "Auto-Recover module Checkpoint" to the module. This command allows a controlled rollback to an older checkpoint if the external checkpoint record matches either  
15 of the two older checkpoint records stored in the module internal memory. The module updates its internal records using data from the accepted checkpoint and outputs audit log records to document the more recent PSD transactions that are to be discarded (transactions more recent than the accepted checkpoint). If none  
20 of the module's internal checkpoint records match the record input from the database, auto-recovery fails and an error is returned to the server. This module is now effectively inhibited from processing PSD packages and operator intervention, using the disaster recovery process, is needed to return it to operation.

25 In summary, the checkpoint validation and auto-recovery processes allows the module to verify that the database providing records is up to date and to automatically resynchronize the module with the database if possible.

30 An Audit Log Verification protects PSD Package Replay. Use of a DES MEC to authenticate a PSD package ensures that the record originated from a module with knowledge of the client's package DES MAC key. The DES MAC verifies that the data within the record has not been modified since the DES MAC was generated.  
35 But because the DES MAC cannot ensure that the record is the most

1 36531/RRT/S850

recent update of the client's data, other safeguards need to be used to prevent or detect substitution of a record created at an earlier time. The module addresses this problem by creating a cryptographically protected audit log entry each time a PSD package is modified by a module. The command scaaeCreateAuditEntry is used to create the audit record. An Audit Log Verification protects PSD Package Replay. Use of a DES MEC to authenticate a PSD package ensures that the record originated from a module with knowledge of the client's package DES MAC key. The DES MAC verifies that the data within the record has not been modified since the DES MAC was generated. But because the DES MAC cannot ensure that the record is the most recent update of the client's data, other safeguards need to be used to prevent or detect substitution of a record created at an earlier time. The module addresses this problem by creating a cryptographically protected audit log entry each time a PSD package is modified by a module. The command scaaeCreateAuditEntry is used to create the audit record.

The initialize cryptocard or update cryptocard commands perform the initializations. Limits are set for the minimum and maximum value of indicium that can be printed. The USPS certificate authority public key certificate is loaded. The provider public key is loaded. Private keys used during new customer registration are loaded. These commands are issued by the Security Officer.

The initialize PSD command assigns the device ID, set the postal registers to zero and generates the PSD public keys. This command is not authenticated but can only be executed once in the life of a PSD.

The authorize PSD command loads the PSD's public key certificate. The PSD's certificate is authenticated by the CA certificate, and the device ID and public key from the

1 36531/RRT/S850

certificate are verified to match those contained in the PSD package.

5 The configure PSD command enters the new customer's customer ID and receives the encrypted secrets from the customer. The module decrypts the secrets using VRSK\_ipost. Preferably, this command is not authenticated but the response returned to the customer is DES MAC'ed by the module with the CDSK\_client key  
10 just received. The customer PC software verifies this DES MAC to ensure that the module has received the CDSK\_client key correctly.

The authorize customer command enters the originating zip  
15 code after the server receives the meter license and then the maximum descending register limit is set. This command is authenticated as a provider role command from the provider's signature using the key UDSK\_auth.

As described above, the cryptographic modules use roles and  
20 services to control access to the module and to specify which services (commands) are available to the user. Services of concern are those that access security parameters or postal financial data protected by the module. Each module supports many roles. In one embodiment, access control is accomplished  
25 as follows.

Authentication may be accomplished by using a secure session. For example, the roles of Security Officer, Key Custodian, Administrator, and Auditor are authenticated after a secure session between the user's PC and the module has been  
30 established. When the user issues an scasmOpenSession command, application software on the user's PC and corresponding software in the module perform the session opening process. An anonymous Diffie-Hellman key generation protocol is used to establish a set of session keys (triple DES keys for encryption and MAC'ing) that  
35 are used during the session. The session keys are not used

1 36531/RRT/S850

directly but instead unique keys, derived from the session keys,  
are used for each successive message.

5       Once a secure session is established, the user sends the  
scaacLogon command containing the user ID and user password. The  
module uses its access account database to verify the user data  
received and to select the role that this user is allowed to  
enter. The user can now send the module any command allowable for  
10 the selected role. In one embodiment, the module design limits  
each user to a single role and will only allow one user to be  
logged on at a time.

Session management provides security services to the  
15 communications between the host and the module. Session  
management will establish a secure channel between the host  
application and the module application. This channel provides  
authentication and optional confidentiality for the data  
exchanged through it. In particular, all command requests and  
20 responses, except those for opening a session, are protected by  
a MAC. This provides authentication to the command. The host  
and module can verify that it is their counterpart that issued  
the command because no other entity can generate the MAC.  
Optionally, the command data can also be encrypted. This  
25 provides confidentiality to the channel.

All commands from the host are initiated by a user that is  
authorized to execute this command on the module. That is, all  
host-initiated commands require an active user with an  
appropriate role (authorized to issue the given command). Except  
30 for Default role, this implies that a user (with that role)  
should be currently logged on. For all users with roles other  
than Default, the session management is closely tied to user  
logon. A session should be established before the logon and it  
lasts while the user is logged on. The session can be terminated  
35 after the user logs off. Logon fails if no session is



1 36531/RRT/S850

established; session termination fails if a user is still logged  
on. Similarly, any module command that requires session security  
5 (encryption or a MAC) is aborted if this mechanism is not used.

An active session is instantiated by active session master  
keys. These keys are exchanged between host and module  
application at session set-up, and they are destroyed at session  
termination. All data transmitted between the host and the  
10 module within a certain session is protected by these session  
master keys. All data is authenticated (by means of a MAC); in  
addition, some data is encrypted to preserve confidentiality.

Preferably, session master keys are not used directly.  
Instead, a temporary key is derived from a session master key for  
15 each transmission. This transaction key is then used to MAC or  
encrypt the transmitted data. The transaction keys are derived  
as a one-way function of the session master keys and a nonce  
(e.g., a transaction sequence counter). This set-up with session  
master keys and derived transaction keys is straightforward, and  
20 it protects the session master key. The transaction keys are  
protected by limiting the amount of ciphertext available for  
attacks. In addition, even if they would be revealed, the use  
of a good one-way function together with nonce for the derivation  
of the transaction keys are sufficient to secure the session  
25 master key.

The Session Master Keys are obtained from an anonymous,  
unauthenticated key exchange. In one embodiment, the key  
exchange protocol is an anonymous (ephemeral-ephemeral) Diffie-  
Hellman protocol executed between the host application and the  
30 module application. The system parameters (a strong prime  $p$ , and  
a generator  $g$ ) are fixed. That is, they are hard-coded into the  
software at both ends. This protocol establishes a shared secret  
that can be used to create a secure channel between the two end  
35 entities.

1 36531/RRT/S850

Anonymous Diffie-Hellman does not provide authentication of the end entities or key confirmation. However, the module can implicitly authenticate the host via user logon and application data authentication provided from outside of the module. Similarly, the host implicitly authenticates the module by verifying that it can process the application data. Finally, key confirmation is achieved at the first exchanged message.

10 Session Management functions include:

- Session Management Services
  - Open Session
  - Close Session
- 15 • Session Security:
  - Compute Session MAC
  - Verify Session MAC
  - 20 • Session Encrypt
  - Session Decrypt

Role Access may be accomplished by Command Authentication. Because many customers need to be provided rapid access to the module, commands from each customer are individually authenticated to provide access control. Each customer has a DES MAC key (CDSK\_client) and generates a DES MAC for each command sent to the module. The module uses its copy of CDSK\_client from the customer's PSD package to perform the command authentication. This meets the requirements for identity-based role authentication. Individual command authentication ensures that each customer is authorized to enter the customer role and that the command is an authorized service of the customer role.

30 The provider role also uses command authentication. Provider commands are signed with the key VDSK\_auth. The e-commerce server provides the interface to the USPS infrastructure

1 36531/RRT/S850

and also functions as the provider when interacting with PSD Packages. When a customer's postal license is approved, the  
5 provider sends an `authorize_customer` command to the module to store the licensing zip code and maximum descending register value in the customer's PSD Package. Completion of the `authorize_customer` command places the PSD Package in the `leased` state, allowing it to begin operating.

10 When the e-commerce server is notified that the customer has deposited funds to buy postage, a `download postage value` command, signed by the provider key, `VDSK_auth`, is sent to the module. The Certificate Authority role is used to load the PSD's public key certificate. This command (`authorize PSD`) is authenticated  
15 when the signature on the certificate provided with the command is authenticated by the CA certificate contained in the module.

Some commands from the server to the module do not require authentication. These commands are used to prepare a PSD for operation, to request status from a PSD, or to facilitate system  
20 operation, for example. None affect data within operating PSD packages.

When the server receives a message from the client requesting an indicium, it forwards the request to the module using the `create indicium` command. Whenever a client's PSD  
25 package is required to perform a module service, the server provides it to the module with the command. The PSD package and the client-provided data elements for the indicium are then used by the module in the following way.

- 30 1. The indicia signing key token is decrypted and the DES MAC key is derived from it. This key is used to verify the DES MAC for the package.
2. The PSD state is checked. Preferably, the package should be in the `leased` state for this command to be executed.
- 35 3. The meter number in the command should match the meter

1 36531/RRT/S850

number in the PSD package.

5 4. The challenge included in the client message is verified.

5. The key token containing the client secrets is decrypted and the DES MAC on the client's request is verified to authenticate the client with his PSD package. This also authenticates the command into the user role.

10 After the above checks are completed, the module is assured of the identity of the client making the request, and is certain that it has a valid PSD package for that client. The module can now perform the requested register modification process.

15 6. The value of the indicium is then checked to ensure it is within the minimum and maximum limits enforced by the module.

7. The DR is checked to see if it contains sufficient value for the indicium.

20 If the above tests are successfully completed, the module completes the indicium creation process:

8. The indicium value is subtracted from the DR and added to the AR.

9. The data elements for the indicium are assembled and the indicium signature is generated.

25 10. The message that will be sent to the client is assembled. In addition to the indicium, this includes the challenge received from the client in the indicium creation request and a new challenge generated by the module that will be returned in the next message from the client. A  
30 DES MAC for this message is generated using the client's CDSK\_client key.

11. The PSD package and checkpoint record are updated and DES MAC's are generated for both.

12. The audit log record is then generated.

35

To broaden the appeal of the IBIP architecture to the small business and enterprise market, one embodiment of the present invention allows multiple employees within a company to access a meter registered to that company as shown in FIG. 8. This embodiment supports such an architecture by leveraging the existing security characteristics of the Postage Server Cryptomodule. In particular, the invention employs identity-based authentication, which is needed to meet the FIPS 140-1 security level 4 requirements. As depicted in FIG. 8, multiple users within an enterprise account are connected via the Internet and a firewall to the Postal server, Postal Transaction server, Provider server, and e-commerce server.

In a single user model where there is a direct one-to-one mapping from customer to PSD, only a single secret needs to be shared between the individual and the cryptographic module. This secret allows the PSD to authenticate the communication with the user. To provide this capability for multiple users, the PSD needs to have access to their secrets as well. In this embodiment of the present invention, the PSD supports the ability to share secrets with multiple users, so that it may perform identity-based authentication of these users. To support this capability, existing services are modified for them to support multiple secrets. Preferably no change is necessary to the secure protocol the system uses to communicate with the user.

Additional user management capabilities support multiple users in a PSD. This is provided through the addition of new services needed to support the administration of a PSD's authorized users. Also, a new role called "customer administrator", is added that has the authority to perform the new services. This embodiment supports multiple users per PSD, supports multiple machines per PSD. In this embodiment, preferably, all users are within the same license. Preferably there is no additional restrictions on a user's capabilities.

In one embodiment, the system of the present invention allows multiple individuals to function as a single customer by separating the user interface function of the host system from the other core functions. An individual interacts with the machine performing the user interface function, which in turn, then communicates with the machine performing the other core functions. The machine performing all core functions of the host system, excluding the user interface, is called a gateway machine. This machine acts, on behalf of the individuals, to perform all customer functions. Multiple individuals are communicating with the gateway from different machines, each of which is performing the user interface function of the host system. These machines are called interface machines.

In this embodiment of the present invention, the gateway is performing the user authentication function. As such, the gateway is responsible for supporting secure communication between the customer and its PSD. This means that the gateway performs the authentication of all messages sent to and received from the PSD.

As previously mentioned, the gateway also performs all other core functions of the host system (excluding the user interface function). Performing these functions at the gateway provides many benefits due to its centralized nature, including consolidated usage logging and simpler configuration management.

A customer entity is responsible for the security of the host system used to access the system. In this embodiment, a gateway and one or more interface machines embody the host system. To provide the same level of security as that afforded by a single machine model, it is necessary for the communication between the interface machines and the gateway to be private and tamper-resistant with respect to the community of users accessing the host system.

When and if the interface machines and the gateway all

1 36531/RRT/S850

reside on a network private to the user community sharing the PSD, typically, no additional security is necessary to protect  
5 their communication. For example, a corporate LAN is typically protected with a firewall that prevents the machines within the private network from being accessed externally.

In this embodiment, the mechanism by which a customer submits a request to purchase postage to the provider  
10 infrastructure is performed on the gateway machine. Additionally, the corresponding purchase approval and download of postage value to the PSD is performed by the provider infrastructure and is preferably unaffected by the introduction of the gateway component. FIG. 9 shows multiple users using a  
15 gateway server to generate secure indicium bitmaps. Users can be connected to the gateway system via a private network or using a secure channel such as SSL if they are using a public network to access the gateway system. Users can print the indicium generated from the gateway system using network printers or local  
20 printers that are available. Also, they can use printers connected to the gateway system.

In one embodiment, an IBI solution that allows users to use IBI from within a standard web browser tool is used. However, running in the browser environment where the UI and potentially  
25 code are delivered dynamically over the Internet brings with it additional security requirements. Improperly designed browser-based IBI systems could allow a number of attacks over the network that are not possible in an application-based system. These include the theft of indicia, substitution of values in  
30 indicia (printing something different than the user requested), substitution of values in postage purchases, and the theft of personal information. Generally, printing of indicia can be broken down into the following exemplary steps: entry of values into UI, generation of indicium by PSD, and Printing.

35 Typically, the security of an IBI system is dependent on the

security of the steps above. In an application-based product these steps are either contained within one cryptoboundary or protected by  
 5 a private, tamper resistant communication mechanism (e.g., SSL). There is a high degree of assurance that what is requested is what is printed and that no one is able to intercept the indicium. A browser plug-in that displays its own native code UI for collecting data for the indicium and prints the indicium itself is shown in FIG. 10.  
 10 This browser offers the same protections as an application. Untrusted code (e.g., JavaScript) cannot access the data in the UI and transparently modify or steal it.

A UI-less (also known as, "headless") browser plug-in that generates and prints indicia with the UI provided by web pages is  
 15 potentially unsafe. A plug-in installed in this manner is visible to all web pages, not just to pages from the original site. This allows attacks on the first arrow. Input can safely be taken from a web page, but only by providing a way to ensure only authorized pages can create and print indicia. It is possible to ensure that the plug-in  
 20 is being called by an authorized web page by having the plug-in check the browser's Document Object Model to check to see if the page was delivered by SSL (to eliminate spoofing) and whether it came from an authorized domain (e.g., \*.stamps.com). If both of these are true, then the plug-in can trust the web page as its UI because the web  
 25 page has been strongly authenticated to be from an authorized source.

This can also be accomplished by having the customer's web browser connect to a web server (proxy) running within the same cryptoboundary, as shown in FIG. 10. Preferably, the proxy only allows connections to authorized domains via SSL. In order to ensure  
 30 that the proxy is only receiving requests from authorized domains, it is necessary for the proxy to authenticate that the request came from a page it delivered to the browser. The easiest way to accomplish this is to only accept requests over the same connection the page was delivered on, but other authentication methods are possible. This  
 35 browser-based design has generally greater security than application-



1 36531/RRT/S850

based designs.

For authentication, each user has a unique user ID and their own  
5 password. Preferably, user administration may only be performed in  
the cryptographic module. Also, client transactions are  
authenticated to a specific user. For access control, the system is  
capable of granting/revoking PSD privileges (e.g., create indicia,  
reset password, retrieve status, retrieve UDSKpsd), and  
10 granting/revoking administrative privileges (e.g., add user, delete  
user, modify user, e.g. privileges, view all users). Some account  
features include account expiration, password expiration (enforced by  
client), logon failure count, and maximum total postage.  
Transactions associated with a specific user may be audited and  
15 administration actions are tracked in an audit trail.

Once the audit log record is generated, the server receives the  
audit record, the updated database records, and the indicium message  
to the client from the module. The server stores the audit record on  
the audit file server and sends the PSD package and checkpoint record  
20 to the database for storage. When the server gets confirmation that  
the database storage operation has been successful, the message  
containing the indicium is transmitted to the client application.

The create postage correction indicium command performs the  
correction indicia creation function. Preferably, it operates  
25 identically to the create indicium command except that it results in  
a correction indicium being generated.

Because redating indicia creation does not involve the PSD  
postal registers, the module does not perform this function. When  
redating of an indicia is necessary, preferably server software  
30 performs this function.

When a meter is removed from service, the create refund indicium  
command is used to empty the meter's DR. This command, which is a  
service of the provider role, is preferably sent from the provider  
infrastructure and signed with the provider key, VDSK\_auth.  
35 Preferably, this command can only be performed if the package is in

1 36531/RRT/S850

the leased state or the pwreset state. When the module receives this command the result is the creation of an indicium equal to the value  
5 remaining in the DR. Because withdrawal is a special case of a normal indicium creation operation, the module preferably performs the same series of checks as for the create indicium command, the difference being the authentication of the provider in place of the customer. As a result of this command, the AR is increased by the  
10 amount of the refund indicium and the DR is reduced to zero. The PSD package state is changed to withdrawn which inhibits this meter from any further use. The indicia data, including a signature using the client's private key, is output to the server to allow the remaining funds to be credited to the client's account. The updated PSD  
15 package, checkpoint record, and audit log record, are output to the server for storage.

VBI value download messages are sent from the provider infrastructure to the PSD. When a customer deposits funds into their account, this triggers the provider's server (the provider software)  
20 to generate a VBI value download message to the customer's PSD. This message is a service of the provider role and is signed by the provider key, VDSK\_auth. The message contains the meter number, control total value (from the last successful resetting), and the VBI download value. The module performs the following steps.

- 25 1. The provider signature on the message is verified.
2. The PSD package is authenticated by checking its DES MAC.
3. The PSD state is checked. Preferably, it should be in the leased state or pwreset state.
4. The meter number in the command must match the meter number  
30 in the PSD package.
5. The control total in the message must equal the sum of the AR and DR from the PSD package.
6. A check is made to ensure that the DR will not exceed a predetermined value (in one embodiment, \$500) after the new VBI  
35 is loaded. A check is also made to ensure that the AR will not

1 36531/RRT/S850

exceed predetermined value after the new VBI is spent.

5 7. If the above tests pass, the module increments the DR by the VBI amount contained in the message.

8. The PSD package and checkpoint record are updated and DES MAC's are generated for both. These are output to the database server for storage.

10 9. The audit log record is generated and output to the server for storage on the audit file server.

Audit support provides functions that enable secure logging of all (sensitive) actions. The security requirements include the authenticity of the entries, completeness, and the inability to  
15 insert (fraudulent) additional entries. For reasons of storage space availability, the storage of the entries happens outside the module. Therefore, the security features are built into the audit entries themselves. To avoid involvement of the originating module (or cloning of the related keys) audit is public key based meaning, the  
20 audit entries are digitally signed. To address performance concerns, this is implemented as follows.

Instead of signing each individual audit entry, the entries are securely chained, and only selected entries in the chain are digitally signed. The security of the chaining mechanism then makes  
25 sure that any previous entries in the chain are implicitly authenticate as well. This chaining can be achieved by means of a hash function: each entry also contains a hash code of the previous entry. Modification of any entry in the chain before a given one then requires finding a second value that hashes to the same hash  
30 code. (This is finding a second pre-image for the used hash function.) That is, the hash code provides a link back to the previous entry in the audit chain, and implicitly to the entire pre-existent audit chain. This is depicted in FIG. 7. In FIG. 7, the arrows between the (identical) hash codes indicate the linking back  
35 through the chain.

1 36531/RRT/S850

The only remaining risk is that the last few entries before a crash may be unsigned (and thus forgeable). This risk can be mitigated by forcing a signature for certain (more sensitive) actions, in addition to forcing a signature on a periodic, recurring basis (for example, each 100 entries) as well as for the first command after a reboot.

All sensitive actions generate an audit entry. Audit entry creation functionality are exposed to the module applications such that audit entries for all sensitive actions can be created. This is the responsibility of each of the functions themselves. Audit entries are available immediately at completion of the sensitive action, to avoid losing audit information due to a crash following it. This is done by providing the entry as a output parameter of the command itself. Storage is the responsibility of the host application. (the SCA layer can provide the tools to verify authenticity and completeness; given the absence of sufficient storage capabilities within the module, there is no way to guarantee availability of audit entries. Therefore, this is left to the host application.)

Audit is started at the earliest possible moment, that is, in the Start Initialization command that effects the exit from Uninitialized state. This means that all sensitive actions following that event can be audited. During the Start Initialization command an Audit Signing Key (DSA) is generated. This event, and anything sensitive that follows can be audited by creating an audit entry.

In one embodiment, an audit entry includes:

- Audit record sequence number
- Hash of the previous audit record
- Identity of software module requesting generation of the audit record
- Identity of the command requesting generation of the audit record
- The user ID (if a user is logged on to the module)

1 36531/RRT/S850

- The user role (if a user is logged on to the module)
- The current state of the module
- 5 • The persistent state of the module
- Date/time stamp
- The reason code
- Data to be stored in the audit record (dependant on the requesting command)
- 10 • Signature (if required by the requesting command)

After the above data elements are prepared for output, a SHA-1 hash for the record is computed and is stored in the module so that it can be included in the next generated audit record. An audit entry is chained to the previous entry by the hash of the previous entry, as shown in FIG. 7. The chaining is enforced by the module by  
15 always storing the last hash in persistent memory. The register used for this is initialized to all-zero (20 bytes) for the first entry.

The chain of audit records begins when the start initialization command is sent to a new module. This first command to the module  
20 generates the DSA audit signing key pair (VDSK\_audit and UDSK\_audit) and uses it to sign the first audit log record. Audit records for commands that affect the module (initialize cryptocard, checkpoint commands, etc) are always signed. Commands that affect a PSD package are not signed but include the hash of the previous record to create  
25 a trusted chain of audit records between records that are signed. The server requests a signature on every several records, for example, every one hundredth record. The public key for authenticating audit record signatures, UDSK\_audit, is extracted from the module using the ExportAuditKey command. This command can only  
30 be executed by the Auditor role.

If an audit entry cannot be generated correctly and in its entirety, this is considered an error. Since the audit chain should not be broken, all data that is correctly obtained is returned in the audit entry. In addition, the command that just finished execution  
35 cannot be undone anymore. Therefore, the command results are

1 36531/RRT/S850

returned to the caller (and eventually, the host) only if the error is non-fatal and the output processing can be performed (i.e. does not require Session Security commands). In general, no additional commands should be executed anymore, so the state is set to Error.

In case the audit chain is still unbroken, the error is not fatal, and may be recoverable through a reboot. (I.e., Persistent state is not set to error.) If the hash chain is broken, the audit is permanently damaged (reliability of any entries younger than the latest signature before the error is somewhat questionable). In this case, the error is fatal, and both Current and Persistent state are set to Error. This is not recoverable, except through a reinitialization of the module.

To avoid continued operation with damaged audit creation capability, the first command after a reboot should be audited, with a forced signature. This ensures that permanently damaged audit creation capability allows the execution of at most one command after rebooting. Since no sensitive functionality can be accessed directly at reboot (e.g., at least a session and a user logon are required), this ensures that no sensitive commands can be executed with damaged audit entry creation capabilities. In summary, audit entry creation only leads to command failure if a fatal error is encountered. If the error is non-fatal, an incomplete audit entry is returned for the command. In addition, the command's results are returned to the caller if their output processing can be performed (i.e. does not require Session Security commands). Also, audit entry creation set the state to Error in case of failure to deliver a complete entry. This error is fatal (non-recoverable except through re-initialization) in case the linking with the existing audit chain is lost. (This occurs only if the previous hash or the sequence number are unavailable.). This is implemented by setting both Current and Persistent state to Error. This error is recoverable through rebooting in all other cases. This is implemented by setting only Current state to Error (Persistent state is not modified). The first

1 36531/RRT/S850

command after booting should always generate a signed audit entry. This ensures that no sensitive commands are executed if the audit is permanently faulty.

The Audit Support Commands include:

- Export audit key
- Create a new audit key
- Create audit entry. This command has a flag to indicate forcing of signature.
- In addition, the Start Initialization command performs the initialization of the Audit (as well as general module initialization) and as such is grouped in the Audit Support module.

External storage (external to the module) and management of the audit database is entirely up to the host; neither SCA nor SHL can play a role in that. In one embodiment, the postal servers store redundant copies of the audit log records on a mirror disk. Storage directly to disk is considered to be more reliable than storage on the database server which is accessed through the LAN. Storing the audit records separately from the PSD package database also protects against all data being lost if the database should suffer a catastrophic failure.

A proper audit verifies the completeness of the audit chain, by verifying all hashes in the chain, starting from the last verified signature, and ending at the most recently created signature. In addition, all signatures encountered should be verified. Finally, the hash of the most recently created audit entry should be logged (manually) to ensure that replacement of the entire chain will be detected. For example, in FIG. 7, if Audit Entry 4 were the last entry, one would verify Signature 1, Hashes 1 through 4 (establishing that the chain is unbroken) and Signature 4. (If Audit Entry 2 were signed as well, that signature should be verified as well.) The Auditor would then log Hash 4 as verified (e.g., written in an audit report) such that the next audit can start at Signature 4. (One may

1 36531/RRT/S850

still want to verify that all earlier entries are present.)

5 Provider software, running on the e-commerce server, verifies  
the integrity of the audit log records at predetermined time  
intervals. First, the chain of records from each module is verified  
by checking all hash values and authenticating the necessary  
signatures. Next, the records from all module can be combined and  
sorted by meter number and time to view the history of each meter.  
10 Because each PSD's AR value is recorded in the audit record after  
each PSD transaction, a database replay attack, which would rollback  
the AR to an earlier value, can be detected. If the audit log  
verification process fails for any reason, the Security Officer is  
notified, for example, by e-mail. The verification starts at the  
15 most recent entry and work back towards the entry logged for the  
previous audit, or the start from the entry logged for the previous  
audit and work forward to the most recent entry.

It will be recognized by those skilled in the art that various  
modifications may be made to the illustrated and other embodiments of  
20 the invention described above, without departing from the broad  
inventive scope thereof. It will be understood therefore that the  
invention is not limited to the particular embodiments or  
arrangements disclosed, but is rather intended to cover any changes,  
adaptations or modifications which are within the scope and spirit of  
25 the invention as defined by the appended claims.

30

35



1 36531/RRT/S850

WHAT IS CLAIMED IS:

5 1. A security system for secure printing of value-bearing items in a wide area computer network comprising:

a plurality of user terminals coupled to the computer network;

10 a database including information about one or more users using the plurality of terminals;

a cryptographic device remote from the plurality of user terminals and coupled to the computer network, wherein the cryptographic device includes a computer executable code for authenticating one or more users; and

15 a plurality of security device transaction data stored in the database for ensuring authenticity of the one or more users, wherein each security device transaction data is related to a user.

20 2. The system of claim 1, wherein the security device transaction data related to a user is loaded into the cryptographic device when the user requests to operate on a value bearing item.

25 3. The system of claim 1, wherein the cryptographic device authenticates the identity of each user and verifies that the identified user is authorized to assume a role and perform a corresponding operation.

30 4. The system of claim 3, wherein the assumed role is a security officer role to initiate a key management function.

5. The system of claim 3, wherein the assumed role is a key custodian role to take possession of shares of keys.

35 6. The system of claim 3, wherein the assumed role is an administrator role to manage a user access control database.

1 36531/RRT/S850

7. The system of claim 3, wherein the assumed role is an auditor role to manage audit logs.

5

8. The system of claim 3, wherein the assumed role is a provider role to withdraw from a user account.

9. The system of claim 3, wherein the assumed role is a user role to operate on a VBI.

10

10. The system of claim 3, wherein the assumed role is a certificate authority role to allow a public key certificate to be loaded and verified.

15

11. The system of claim 3, wherein the cryptographic device includes a state machine for determining a state corresponding to availability of one or more commands in conjunction with the role.

12. The system of claim 1, wherein the cryptographic device includes a data validation subsystem and an auto-recovery subsystem for allowing the device to verify that data is up to date and to automatically re-synchronize the device with the data.

20

13. The system of claim 1, wherein the cryptographic device is stateless.

25

14. The system of claim 1, wherein the cryptographic device includes a computer executable code for preventing unauthorized modification of data.

30

15. The system of claim 14, wherein the computer executable code prevents the unauthorized modification, substitution, insertion, and deletion of related data and cryptographically critical security parameters.

35

1 36531/RRT/S850

16. The system of claim 1, wherein the cryptographic device includes a computer executable code for preventing unauthorized disclosure of data.  
5

17. The system of claim 16, wherein the data includes non-public contents of a postage meter, including plaintext cryptographic keys and other critical security parameters.  
10

18. The system of claim 1, wherein the cryptographic device includes a computer executable code for ensuring the proper operation of cryptographic security and VBI related meter functions.

19. The system of claim 1, wherein the cryptographic device includes a computer executable code for detecting errors and preventing a compromise of the transaction data or critical cryptographic security parameters as a result of the errors.  
15

20. The system of claim 1, wherein at least one of the users is an enterprise account.  
20

21. The system of claim 3, wherein the cryptographic device includes a computer executable code for supporting multiple concurrent users and maintaining a separation of roles and operations performed by each user.  
25

22. The system of claim 1, wherein the cryptographic device stores information about a number of last transactions in a respective internal register.  
30

23. The system of claim 22, wherein the database stores a table including the respective information about a last transaction, a verification module to compare the information saved in the device with the information saved in the database.  
35

1 36531/RRT/S850

24. The system of claim 1, wherein the database includes data  
for creating one or more indicium, account maintenance, and revenue  
5 protection.

25. The system of claim 24, wherein the data includes virtual  
meter information.

10 26. The system of claim 24, wherein the data includes ascending  
and descending registers data.

27. The system of claim 1, wherein the value bearing item is  
a mail piece.

15 28. The system of claim 27, wherein the mail piece includes a  
digital signature.

29. The system of claim 1, wherein the cryptographic device  
20 encrypts validation information according to a user request for  
printing a VBI.

30. The system of claim 27, wherein the cryptographic device  
generates data sufficient to print a postal indicium in compliance  
25 with postal service regulation on the mail piece.

31. The system of claim 1, wherein the value bearing item is  
a ticket.

30 32. The system of claim 1, wherein a bar code is printed on the  
value bearing item.

33. The system of claim 1, wherein the value bearing item is  
a coupon.

35

1 36531/RRT/S850

34. The system of claim 1, wherein the value bearing item is currency.

5

35. The system of claim 1, wherein the value bearing item is a voucher.

36. The system of claim 1, wherein the value bearing item is a traveler's check.

10

37. The system of claim 1, wherein each security device transaction data includes one or more of an ascending register value, a descending register value, a respective cryptographic device ID, an indicium key certificate serial number, a licensing ZIP code, a key token for an indicium signing key, user secrets, a key for encrypting user secrets, data and time of last transaction, last challenge received from a respective client subsystem, an operational state of the respective device, expiration dates for keys, and a passphrase repetition list.

20

38. The system of claim 1, wherein each security device transaction data includes one or more of a private key, a public key, and a public key certificate, wherein the private key is used to sign device status responses and a VBI which, in conjunction with a public key certificate, demonstrates that the device and the VBI are authentic.

25

39. The system of claim 1 further comprising at least one more cryptographic device remote from the plurality of user terminals coupled to the computer network, wherein the at least one more cryptographic device includes a computer executable code for authenticating any of the plurality of users.

30

35

1 36531/RRT/S850

40. The system of claim 39, wherein the cryptographic device shares a secret with the at least one more cryptographic device.

5

41. The system of claim 39, wherein one of the plurality of cryptographic devices is a master device and generates a master key set (MKS).

10

42. The system of claim 41, wherein the MKS includes a Master Encryption Key (MEK) used to encrypt keys when stored outside the device.

15

43. The system of claim 42, wherein the MKS further includes a Master Authentication Key (MAK) used to compute a DES MAC for signing keys when stored outside of the device.

20

44. The system of claim 41, wherein the MKS is exported to other cryptographic devices by any cryptographic device.

45. The system of claim 1, wherein the database includes a user profile for a subset of the plurality of users.

25

46. The system of claim 45, wherein the user profile includes username, user role, password, logon failure count, logon failure limit, logon time-out limit, account expiration, password expiration, and password period.

30

47. The system of claim 11, wherein the state machine includes one or more of an uninitialized state, an initialized state, an operational state, an administrative state, an exporting shares state, an importing shares state, and an error state.

35

1 36531/RRT/S850

48. The system of claim 47, wherein the command corresponding  
to the operational state comprises commands for one or more of access  
5 control, session management, key management, and audit support.

49. The system of claim 1, wherein the cryptographic device is  
capable of performing one or more of Rivest, Shamir and Adleman (RSA)  
public key encryption, DES, Triple-DES, DSA signature, SHA-1, and  
10 Pseudo-random number generation algorithms.

50. A method for secure printing of value-bearing items over  
a computer network having a plurality of user terminals, the method  
comprising the steps of:

15 storing information about a plurality of users using the  
plurality of terminals in a database remote from the plurality of  
user terminals;

securing the information about the users in the database  
by one or more of cryptographic devices remote from the plurality of  
20 user terminals; and

storing a plurality of security device transaction data in  
the database, wherein each transaction data is related to one of the  
plurality of users.

25 51. The method of claim 50 further comprising the step of  
loading a security device transaction data related to a user into one  
of the one or more of cryptographic devices when the user requests to  
operate on a value bearing item.

30 52. The method of claim 50 further comprising the step of  
authenticating the identity of each user.

53. The method of claim 52 further comprising the step of  
verifying that the requesting user is authorized to assume a role and  
35 to perform a corresponding operation.

1 36531/RRT/S850

54. The method of claim 53, wherein the assumed role is a security officer role and the corresponding command is initiating a key management function.

55. The method of claim 53, wherein the assumed role is an administrator role to manage a user access control.

56. The method of claim 53, wherein the assumed role is an auditor role to manage audit logs.

57. The method of claim 53, wherein the assumed role is a provider role to authorize increasing credit for a user account.

58. The method of claim 53, wherein the assumed role is a user role to perform expected IBIP postal meter operations.

59. The method of claim 53, wherein the assumed role is a certificate authority role to allow a public key certificate to be loaded and verified.

60. The method of claim 53, further comprising the step of determining a state corresponding to availability of one or more commands in conjunction with the roles.

61. The method of claim 60, wherein the state machine includes one or more of an uninitialized state, an initialized state, an operational state, an administrative state, an exporting shares state, an importing shares state, and an error state.

62. The method of claim 50, further comprising the steps of verifying that the database is up to date.

35



1 36531/RRT/S850

63. The method of claim 62, further comprising the steps of  
automatically re-synchronizing each of the cryptographic devices with  
5 the database.

64. The method of claim 50, further comprising the step of  
preventing unauthorized modification of data.

10 65. The method of claim 64, wherein the step of preventing  
comprises preventing unauthorized modification, substitution,  
insertion, and deletion of postage related data and cryptographically  
critical security parameters.

15 66. The method of claim 50, further comprising the step of  
preventing unauthorized disclosure of data.

67. The method of claim 50, further comprising the step of  
ensuring the proper operation of cryptographic security and VBI  
20 related meter functions.

68. The method of claim 50, further comprising the steps of  
detecting errors and preventing a compromise of the transaction data  
or critical cryptographic security parameters as a result of the  
25 errors.

69. The method of claim 53, further comprising the steps of  
supporting multiple concurrent operators and maintaining a separation  
of roles and operations performed by each operator.

30

70. The method of claim 50, further comprising the steps of:  
storing information about a number of last transactions in  
a respective internal register of each of the one or more  
cryptographic devices;

35 storing a table including the information about a last

1 36531/RRT/S850

transaction in the database;

5 comparing the information saved in the respective device  
with the respective information saved in the database; and

loading a new transaction data if the respective  
information stored in the device compares with the respective  
information stored in the database.

10 71. The method of claim 50, further comprising the step of  
storing data for creating an indicium, account maintenance, and  
revenue protection.

15 72. The method of claim 50, further comprising the step of  
printing a mail piece.

73. The method of claim 72, wherein the mail piece includes a  
digital signature.

20 74. The method of claim 72, wherein the mail piece includes a  
postage amount.

25 75. The method of claim 72, wherein the mail piece includes an  
ascending register of used postage and descending register of  
available postage.

76. The method of claim 50, further comprising the step of  
printing a ticket.

30 77. The method of claim 50, further comprising the step of  
printing a bar code.

78. The method of claim 50, further comprising the step of  
printing a coupon.

35

1 36531/RRT/S850

79. The method of claim 50, further comprising the step of printing currency.

5

80. The method of claim 50, further comprising the step of printing a voucher.

81. The method of claim 50, further comprising the step of  
10 printing a traveler's check.

82. The method of claim 50, wherein the security device transaction data includes an ascending register value, a descending register value, a respective cryptographic device ID, an indicium key  
15 certificate serial number, a licensing ZIP code, a key token for an indicium signing key, user secrets, a key for encrypting user secrets, data and time of last transaction, last challenge received from a respective client subsystem, an operational state of the respective device, expiration dates for keys, and a passphrase  
20 repetition list.

83. The method of claim 50, further comprising the step of using a private key to sign device status responses and the VBI which, in conjunction with a public key certificate, demonstrates  
25 that the device and the VBI are authentic.

84. The method of claim 50, further comprising the step of sharing a secret with any of the other devices.

85. The method of claim 50, further comprising the step of  
30 generating a master key set (MKS).

86. The method of claim 85, wherein the step of generating the MKS comprises the steps of generating a Master Encryption Key (MEK)  
35 used to encrypt keys when stored outside the device.

1 36531/RRT/S850

87. The method of claim 86, further comprising the step of  
generating a Master Authentication Key (MAK) used to compute a DES  
5 MAC for signing keys when stored outside of the device.

88. The method of claim 85, further comprising the step of  
exporting the MKS to other cryptographic devices by any cryptographic  
device.

10 89. The method of claim 50, further comprising the step of  
storing a user profile for a subset of the plurality of users.

90. The method of claim 80, wherein the user profile includes  
15 username, user role, password, logon failure count, logon failure  
limit, logon time-out limit, account expiration, password expiration,  
and password period

91. The method of claim 50, further comprising the step of  
20 performing one or more of Rivest, Shamir and Adleman (RSA) public key  
encryption, DES, Triple-DES, DSA signature, SHA-1, and Pseudo-random  
number generation algorithms by each of the cryptographic devices.

92. A system for secure processing of value-bearing items  
25 (VBIs) in a computer network comprising:

a plurality of user terminals coupled to the computer  
network;

a database coupled to the network and remote from the  
plurality of user terminals for storing information about one or more  
30 users using the plurality of terminals; and

a server system coupled to the network including a  
cryptographic device for performing secure VBI functions utilizing  
the information stored in the database.

35

1 36531/RRT/S850

93. The system of claim 92, wherein at least one of the users is an enterprise account.

5

94. The system of claim 92, further comprising a plurality of security device transaction data stored in the database for ensuring authenticity and authority of each of the plurality of users, wherein each transaction data is related to one of the plurality of users and the security device transaction data related to a user is loaded into the cryptographic device when the user requests a VBI function.

10

95. The system of claim 92, wherein the cryptographic device authenticates the identity of each user and verifies that the identified user is authorized to assume a role and perform a corresponding operation.

15

96. The system of claim 95, wherein the assumed role is an administrator role to manage a user access control database.

20

97. The system of claim 95, wherein the assumed role is a provider role to authorize increasing credit for a user account.

98. The system of claim 95, wherein the assumed role is a user role to perform expected IBIP postal meter operations.

25

99. The system of claim 92, wherein the cryptographic device stores information about a number of last transactions in a respective internal register, the database stores a table including the respective information about a last transaction, a verification module to compare the information saved in the device with the information saved in the table.

30

100. The system of claim 92, wherein the database includes data for creating indicium, account maintenance, and revenue protection.

35

1 36531/RRT/S850

101. The system of claim 92, wherein the value bearing item is a mail piece.

5

102. The system of claim 92, wherein the mail piece includes a digital signature.

103. The system of claim 92, wherein the mail piece includes a postage amount.

10

104. The system of claim 92, wherein the mail piece includes an ascending register of used postage and descending register of available postage.

15

105. The system of claim 92, wherein the value bearing item is a ticket.

106. The system of claim 92, wherein the value bearing item includes a bar code.

20

107. The system of claim 92, wherein the value bearing item is a coupon.

108. The system of claim 92, wherein the value bearing item is currency.

25

109. The system of claim 92, wherein the value bearing item is a voucher.

30

110. The system of claim 92, wherein the value bearing item is a traveler's check.

111. The system of claim 92, wherein each security device transaction data includes an ascending register value, a descending

35

1 36531/RRT/S850

register value, a respective cryptographic device ID, an indicium key  
certificate serial number, a licensing ZIP code, a key token for an  
5 indicium signing key, user secrets, a key for encrypting user  
secrets, data and time of last transaction, last challenge received  
from a respective client subsystem, an operational state of the  
respective device, expiration dates for keys, and a passphrase  
repetition list.

10

112. The system of claim 92, wherein each security device  
transaction data includes a private key, a public key, and a public  
key certificate, wherein the private key is used to sign device  
status responses and a VBI which, in conjunction with a public key  
15 certificate, demonstrates that the device and the VBI are authentic.

113. The system of claim 92, wherein the cryptographic device  
is capable of performing one or more of Rivest, Shamir and Adleman  
(RSA) public key encryption, DES, Triple-DES, DSA signature, SHA-1,  
20 and Pseudo-random number generation algorithms.

114. The system of claim 92, wherein the cryptographic device  
protects data using a stored secret.

25 115. The system of claim 114, wherein the secret is a password.

116. The system of claim 114, wherein the secret is a  
public/private key pair.

30 117. A method for secure processing of value-bearing items  
(VBIs) in a computer network including a plurality of user terminals  
the method comprising the steps of:

storing information about one or more users using the  
plurality of terminals in a database coupled to the network and  
35 remote from the plurality of user terminals; and

1 36531/RRT/S850

performing secure VBI functions utilizing the information  
stored in the database by a cryptographic device remote from the  
5 plurality of user terminals.

118. The method of claim 117 further comprising the step of  
storing a plurality of security device transaction data in the  
database wherein, each transaction data is related to one of the  
10 plurality of users.

119. The method of claim 118 further comprising the step of  
loading a security device transaction data related to the  
cryptographic device when the user requests to operate on a VBI.

15

120. The method of claim 117 further comprising the steps of  
authenticating the identity of each user and verifying that the  
identified user is authorized to assume a role and to perform a  
corresponding operation.

20

121. The method of claim 120, wherein the assumed role is an  
administrator role to manage a user access control.

122. The method of claim 120, wherein the assumed role is a  
25 provider role to authorize increasing credit for a user account.

123. The method of claim 120, wherein the assumed role is a user  
role to perform expected IBIP postal meter operations.

124. The method of claim 117, further comprising the step of  
30 printing a postage value including a postal indicium.

125. The method of claim 124, wherein the postal indicium  
comprises a digital signature.

35



1 36531/RRT/S850

126. The method of claim 124, wherein the postal indicium comprises a postage amount.

5

127. The method of claim 124, wherein the postal indicium comprises an ascending register of used postage and descending register of available postage.

10 128. The method of claim 117, further comprising the step of printing a ticket.

129. The method of claim 117, further comprising the step of printing a bar code.

15

130. The method of claim 117, further comprising the step of printing a coupon.

131. A method for secure processing of a value bearing item on a computer network having a plurality of users using a plurality of computer terminals for connecting to the network and a plurality of cryptographic devices remote from the users and coupled to the network, each cryptographic device executing a plurality of security device transactions, the method comprising the steps of:

25 requesting by a user authorization for a role;  
assigning a security device transaction data to the requesting user, wherein the security device transaction data may be executed on any of the plurality of cryptographic devices;  
authenticating the identity of the user;  
30 granting the requested role;  
issuing a command that is available for the requested role;  
and  
executing the issued command.

35

1 36531/RRT/S850

132. The method of claim 131, wherein at least one of the users is an enterprise account.

5

133. The method of claim 131, wherein the requested role is a provider role to authorize increasing credit for a user account.

134. The method of claim 131, wherein the requested role is a user role to perform expected IBIP postal meter operations.

10

135. The method of claim 131, wherein the requested role is a certificate authority role to allow a public key certificate to be loaded and verified.

15

136. The method of claim 131, further comprising the step of preventing unauthorized and undetected modification of data, including the unauthorized modification, substitution, insertion, and deletion of postage related data and cryptographically critical security parameters.

20

137. The method of claim 131, further comprising the step of preventing unauthorized disclosure of non-public contents of a postage meter, including plaintext cryptographic keys and other critical security parameters.

25

138. The method of claim 131, further comprising the step of ensuring the proper operation of cryptographic security and VBI related meter functions.

30

139. The method of claim 131, further comprising the steps of detecting errors and preventing a compromise of the transaction data and critical cryptographic security parameters as a result of the errors.

35

1 36531/RRT/S850

140. The method of claim 131, further comprising the step of providing indications of an operational state of a VBI meter.

5

141. The method of claim 131, further comprising the steps of supporting multiple concurrent operators and maintaining a separation of roles and operations performed by each operator.

10

142. The method of claim 131, further comprising the steps of:  
storing information about a number of last transactions in a respective internal register of each cryptographic device;  
storing a table including the information about a last transaction in the database; and

15

comparing the information saved in the respective device with the respective information saved in the database.

20

143. The method of claim 142, further comprising the step of loading a new transaction data if the respective information stored in the device compares with the respective information stored in the database.

25

144. The method of claim 131, further comprising the step of storing data for creating indicium, account maintenance, and revenue protection.

145. The method of claim 131, further comprising the step of printing a postage value including a postal indicium.

30

146. The method of claim 145, wherein the postal indicium comprises a digital signature.

147. The method of claim 145, wherein the postal indicium comprises a postage amount.

35

1 36531/RRT/S850

148. The method of claim 145, wherein the postal indicium comprises an ascending register of used postage and a descending register of available postage.  
5

149. The method of claim 131, further comprising the step of printing a ticket.

10 150. The method of claim 131, further comprising the step of printing a bar code.

151. The method of claim 131, further comprising the step of printing an image.  
15

152. The method of claim 131, further comprising the step of printing a coupon.

153. The method of claim 131, further comprising the step of printing currency.  
20

154. The method of claim 131, further comprising the step of printing a voucher.

25 155. The method of claim 131, further comprising the step of printing a traveler's check.

156. The method of claim 131, wherein the security device transaction data includes an ascending register value, a descending register value, a respective cryptographic device ID, an indicium key certificate serial number, a licensing ZIP code, a key token for an indicium signing key, user secrets, a key for encrypting user secrets, data and time of last transaction, last challenge received from a respective client subsystem, an operational state of the respective device, expiration dates for keys, and a passphrase  
35

1 36531/RRT/S850

repetition list.

5 157. The method of claim 131, further comprising the step of using a private key to sign device status responses and the VBI which, in conjunction with a public key certificate, demonstrates that the device and the VBI are authentic.

10 158. The method of claim 131, further comprising the step of sharing a secret with all the other devices.

159. The method of claim 158, wherein the secret is a password.

15 160. The method of claim 158, wherein the secret is a public/private key pair.

161. The method of claim 131, further comprising the step of performing one or more of Rivest, Shamir and Adleman (RSA) public key  
20 encryption, DES, Triple-DES, DSA signature, SHA-1, and Pseudo-random number generation algorithms by each of the cryptographic devices.

25

30

35

1                    CRYPTOGRAPHIC MODULE FOR SECURE PROCESSING  
                    OF VALUE-BEARING ITEMS

ABSTRACT OF THE DISCLOSURE

5            An on-line value bearing item (VBI) printing system that  
            includes one or more cryptographic modules and a central database is  
            disclosed. The cryptographic modules are capable of implementing the  
            USPS Information Based Indicia Program Postal Security Device  
            Performance Criteria and other required VBI standards. The modules  
10           encipher the information stored in the central database for all of  
            the on-line VBI system customers and are capable of preventing access  
            to the database by unauthorized users. Additionally, the  
            cryptographic module is capable of preventing unauthorized and  
            undetected modification, including the unauthorized modification,  
15           substitution, insertion, and deletion of VBI related data and  
            cryptographically critical security parameters.

20           RRT/dsz

DSZ PAS279661.1--10/13/00 12:52 PM

25

30

35

FIG. 1

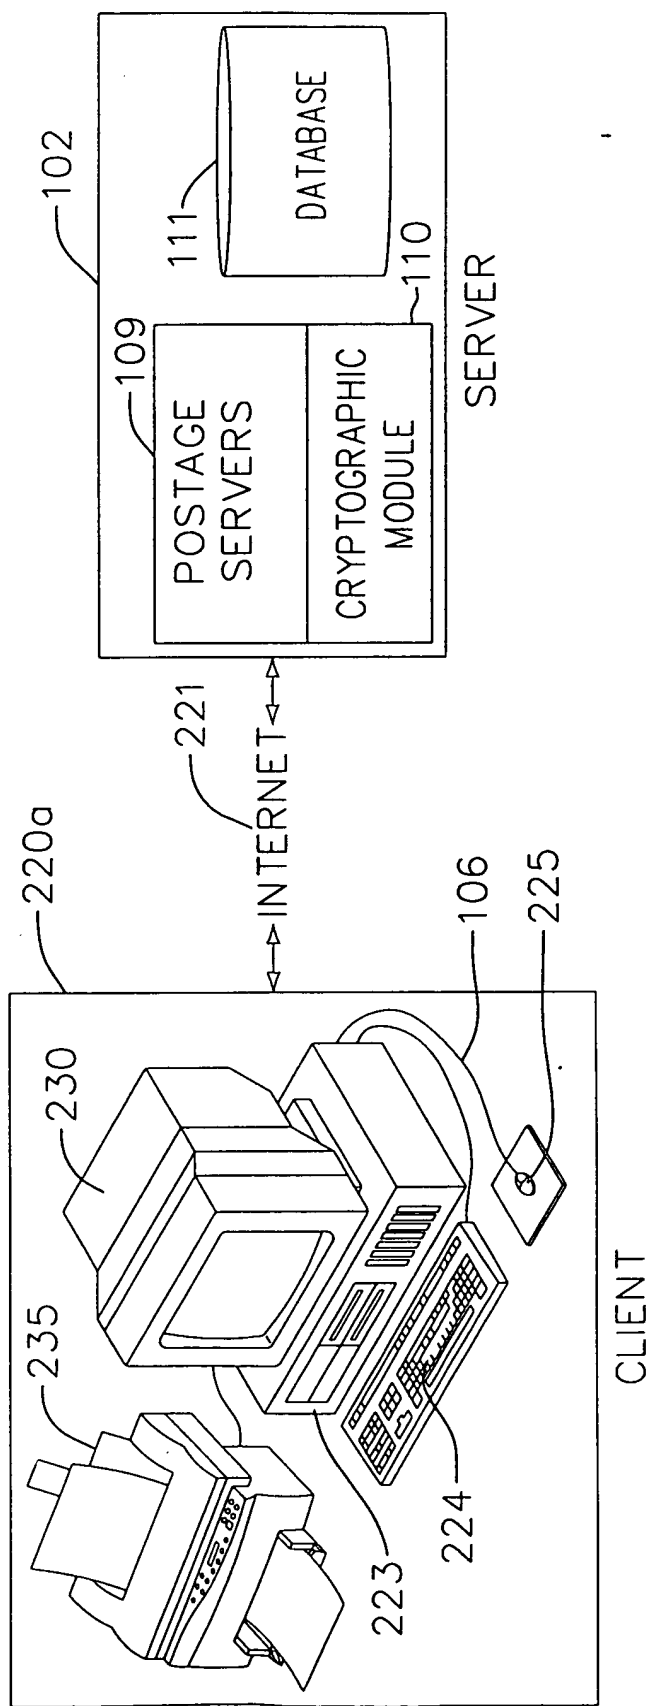


FIG. 2

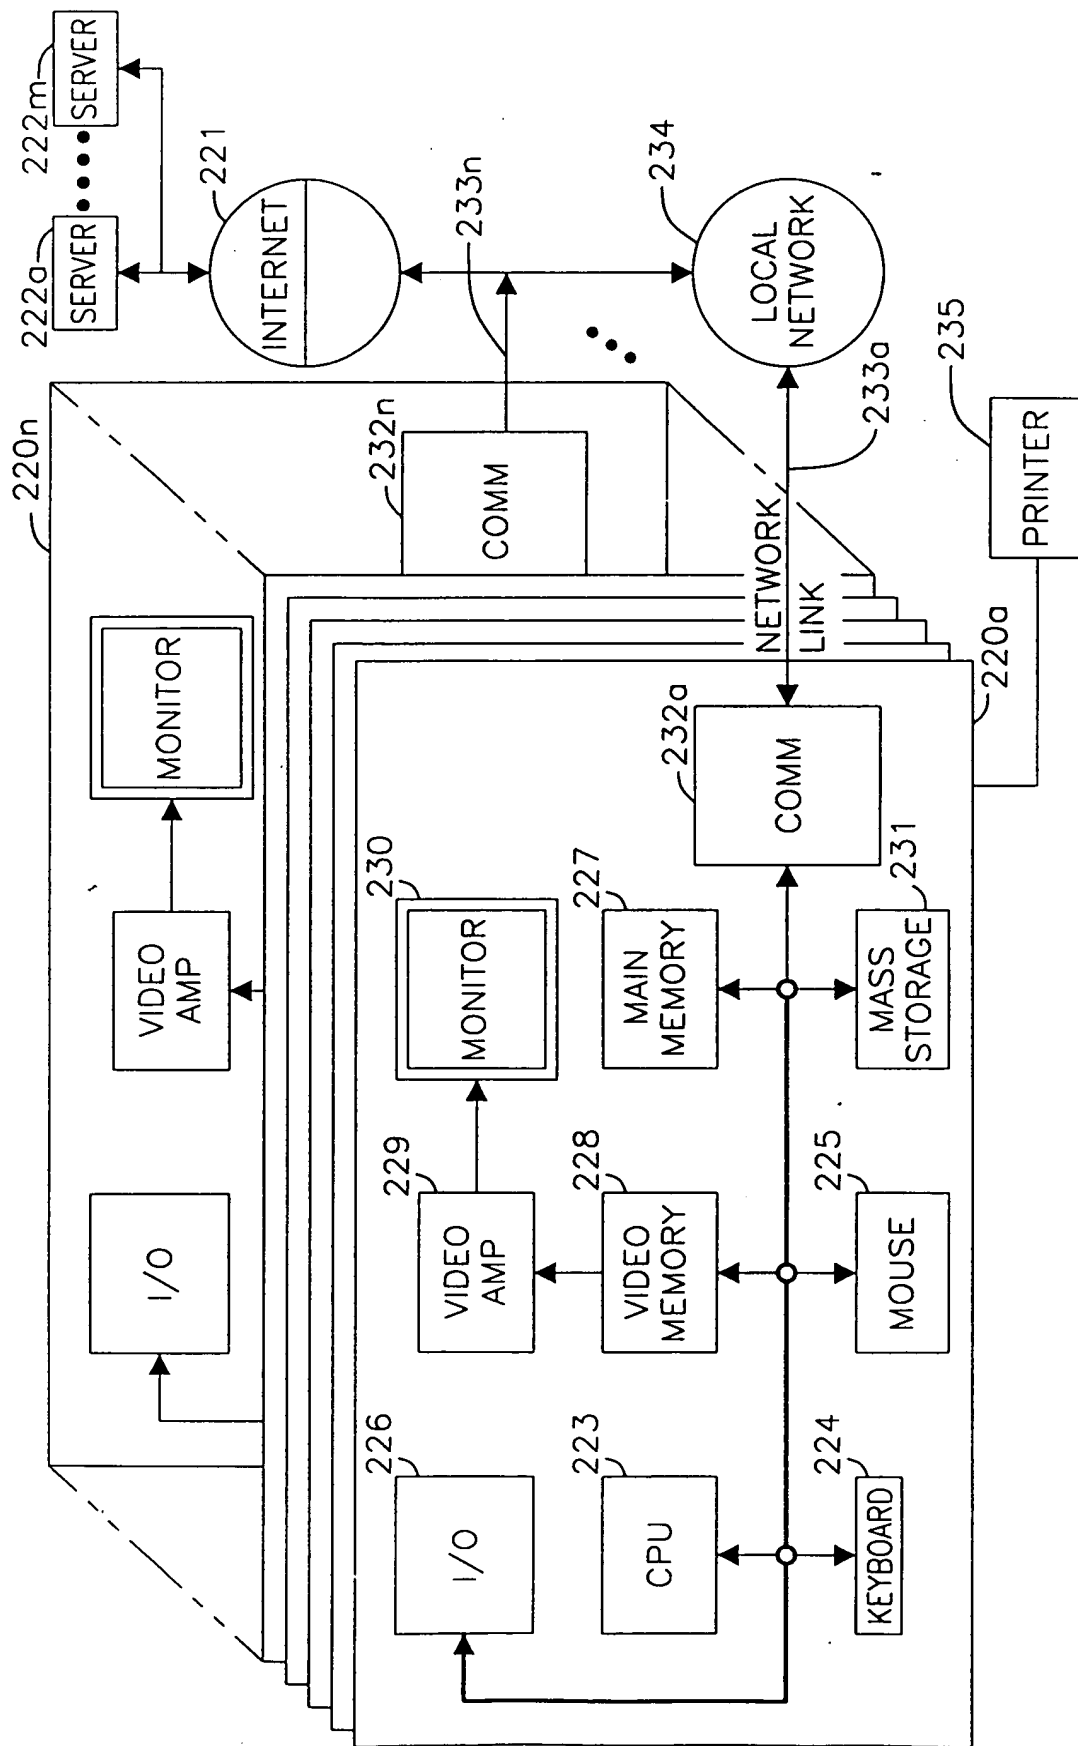




FIG. 3

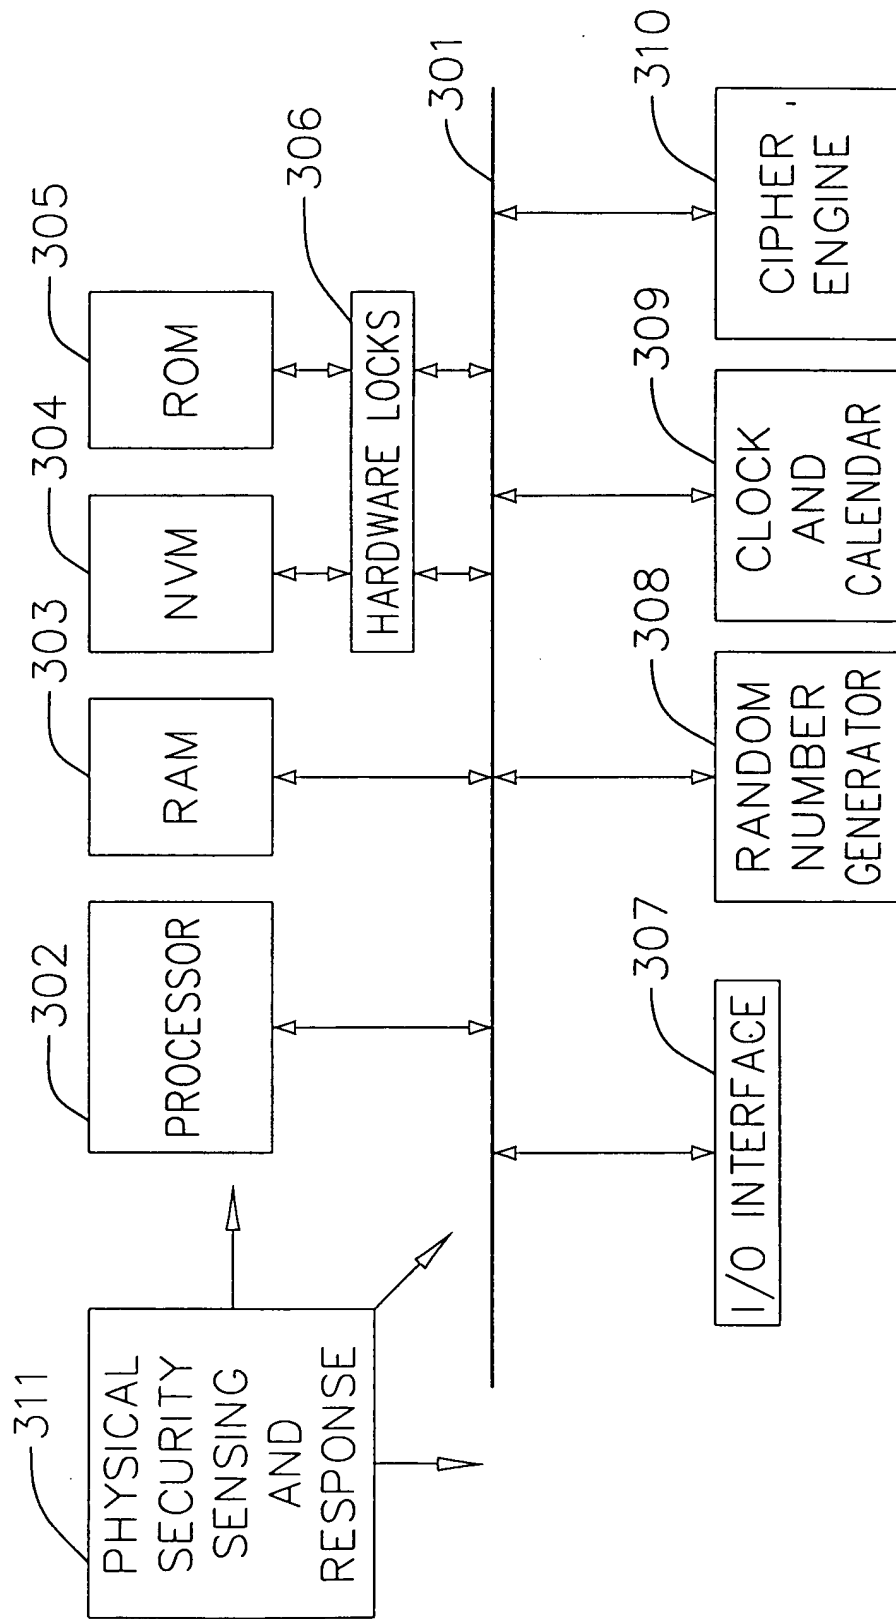


FIG. 4

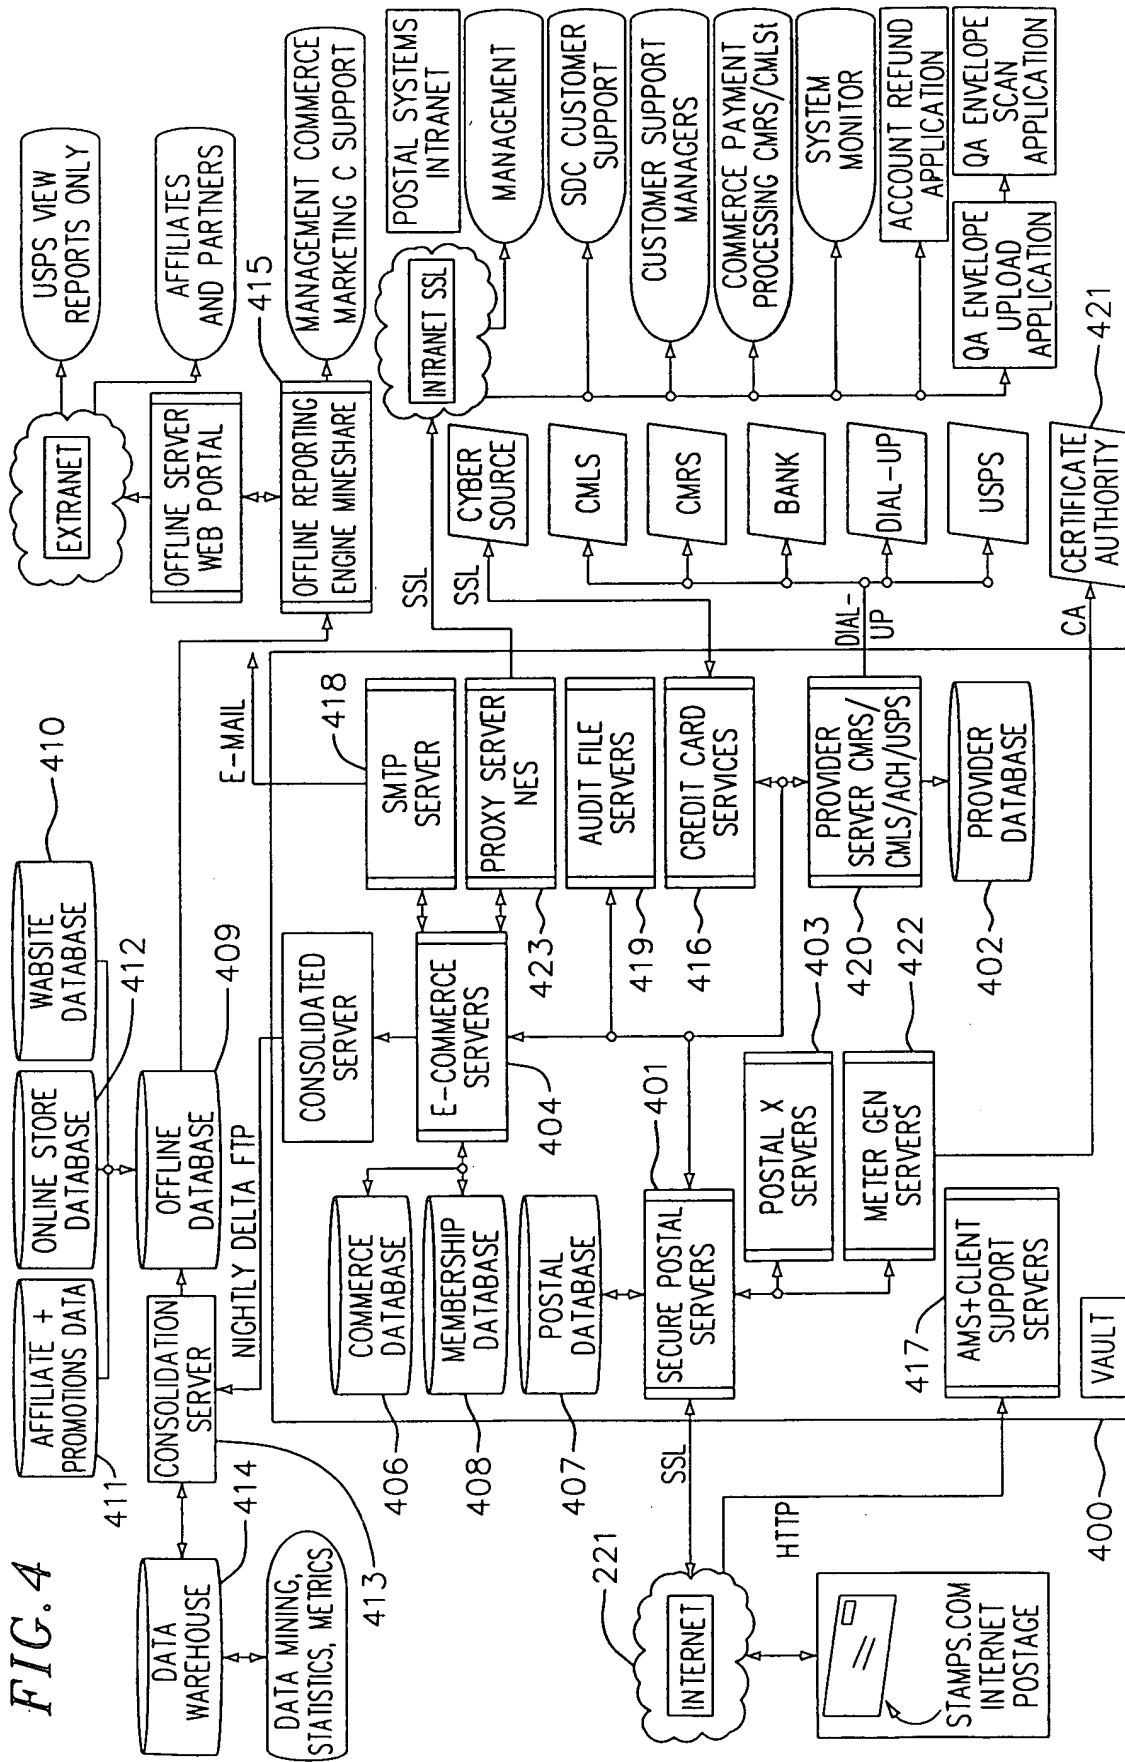


FIG. 5

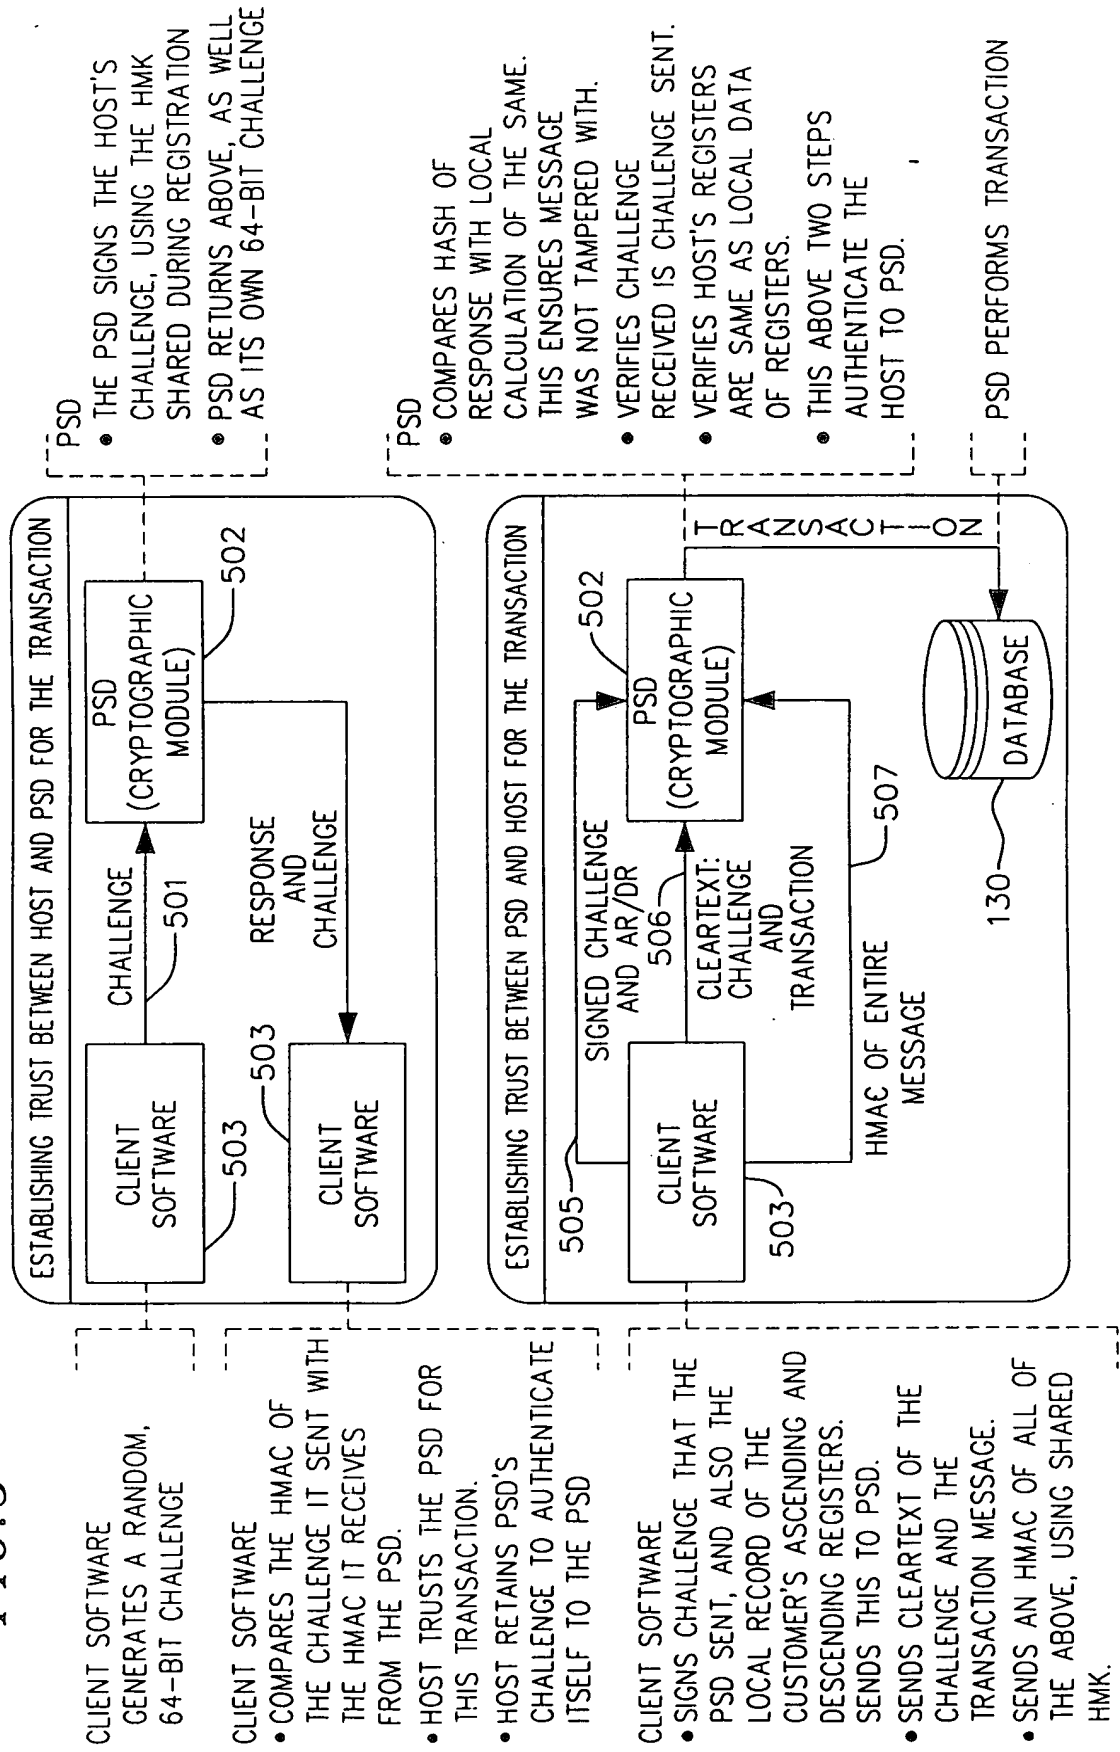


FIG. 6

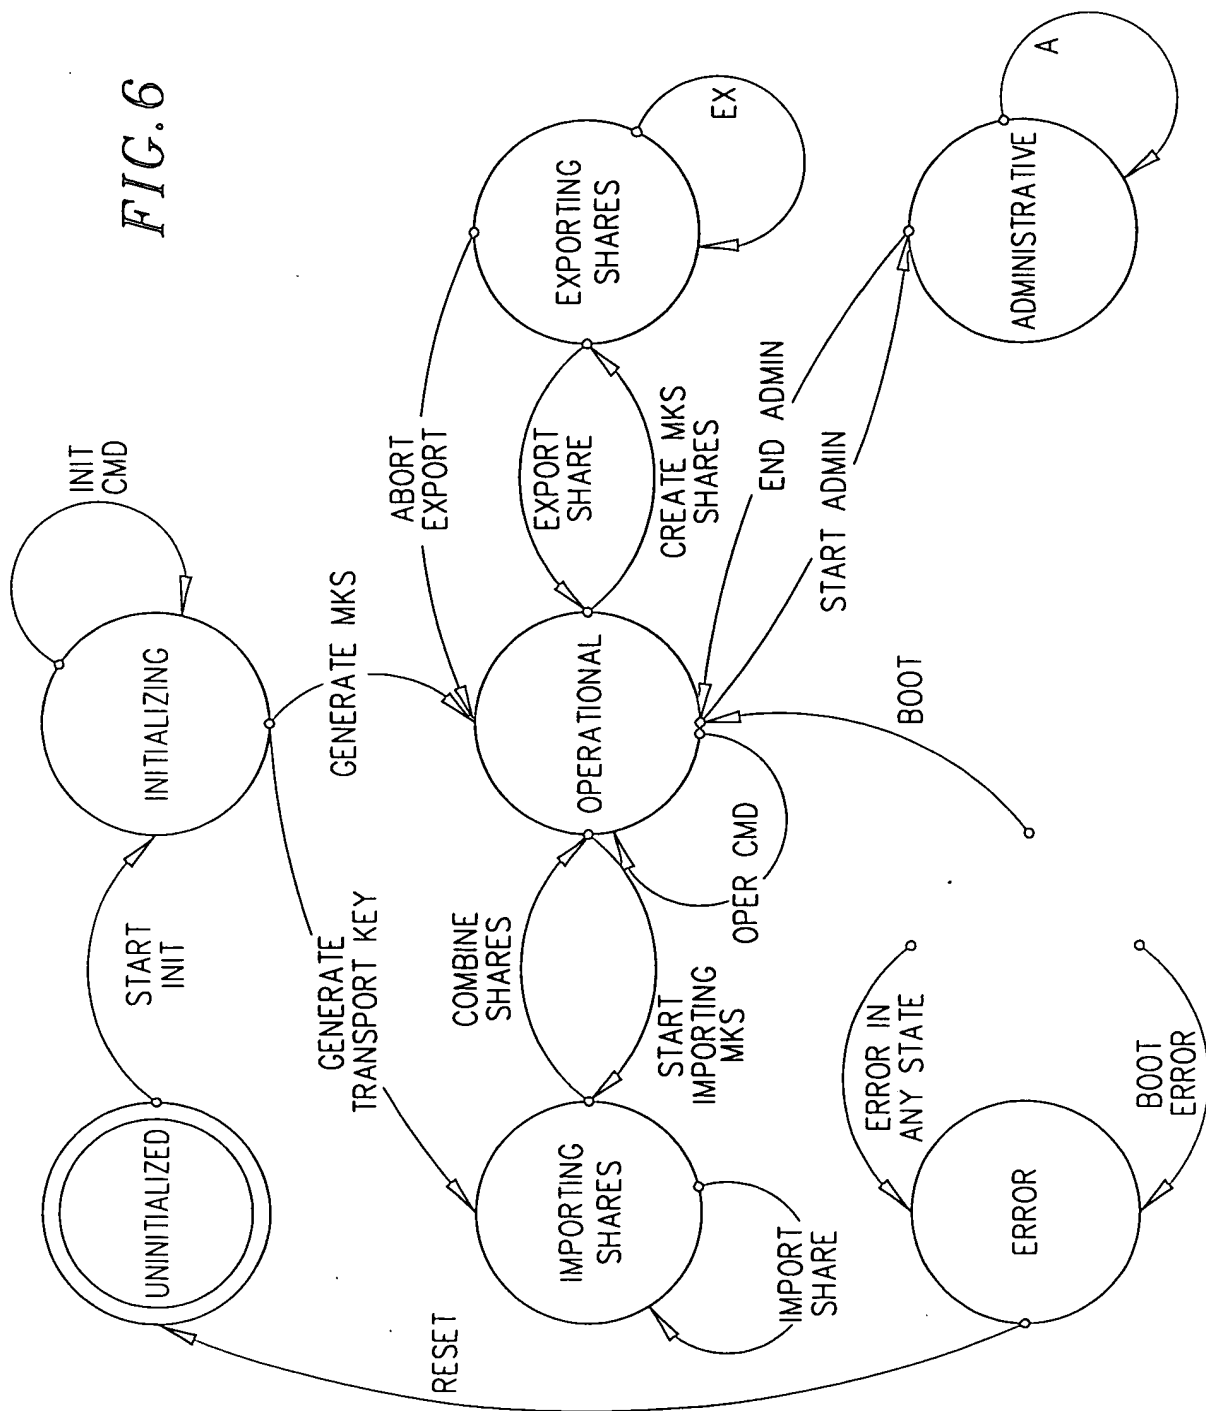


FIG. 7

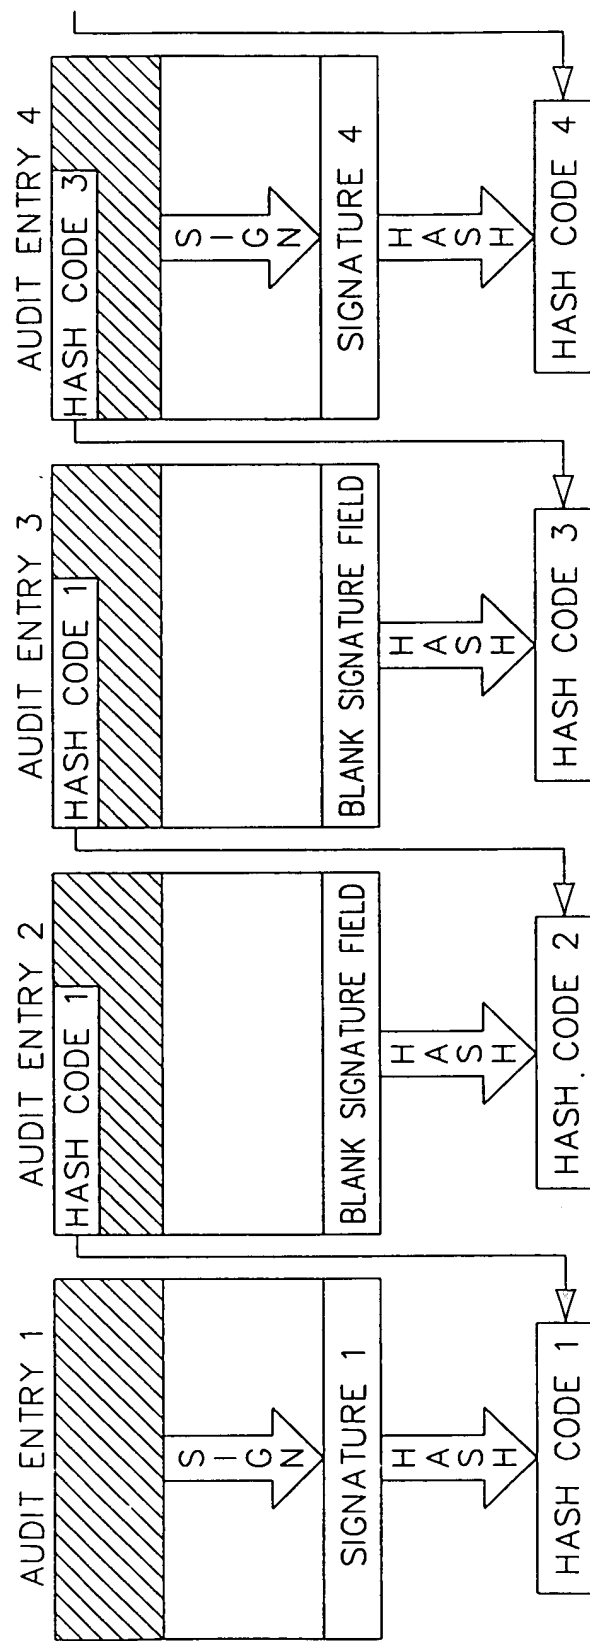


FIG. 8


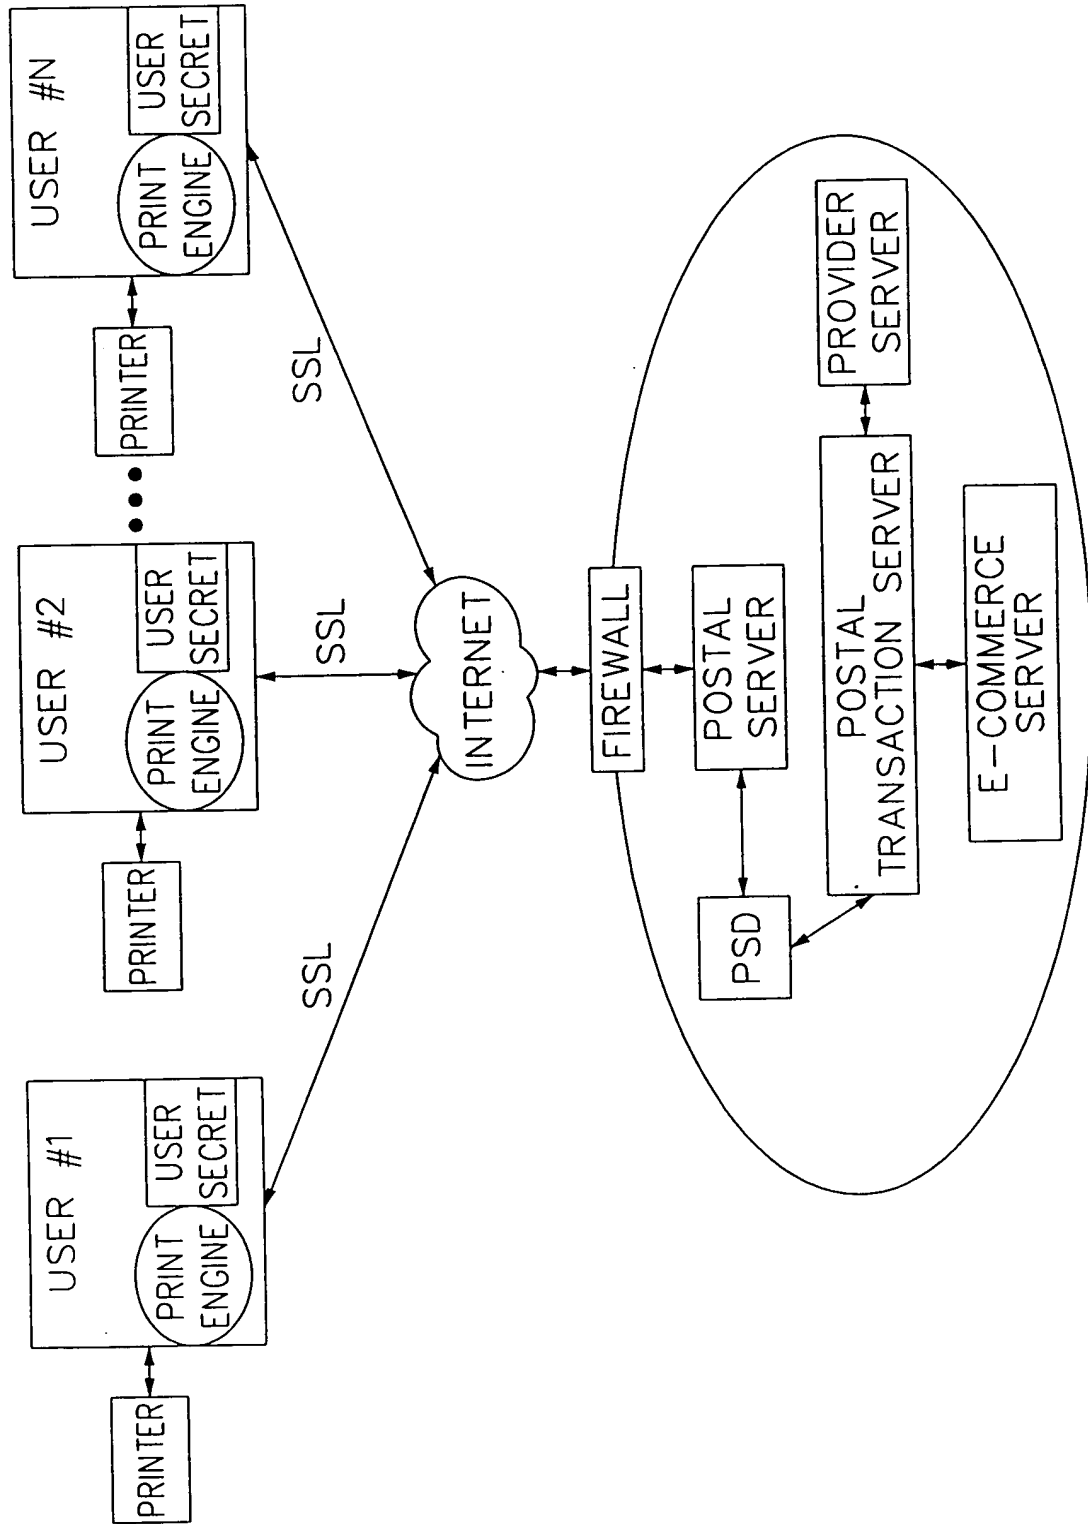


FIG. 9



**FIG. 10**

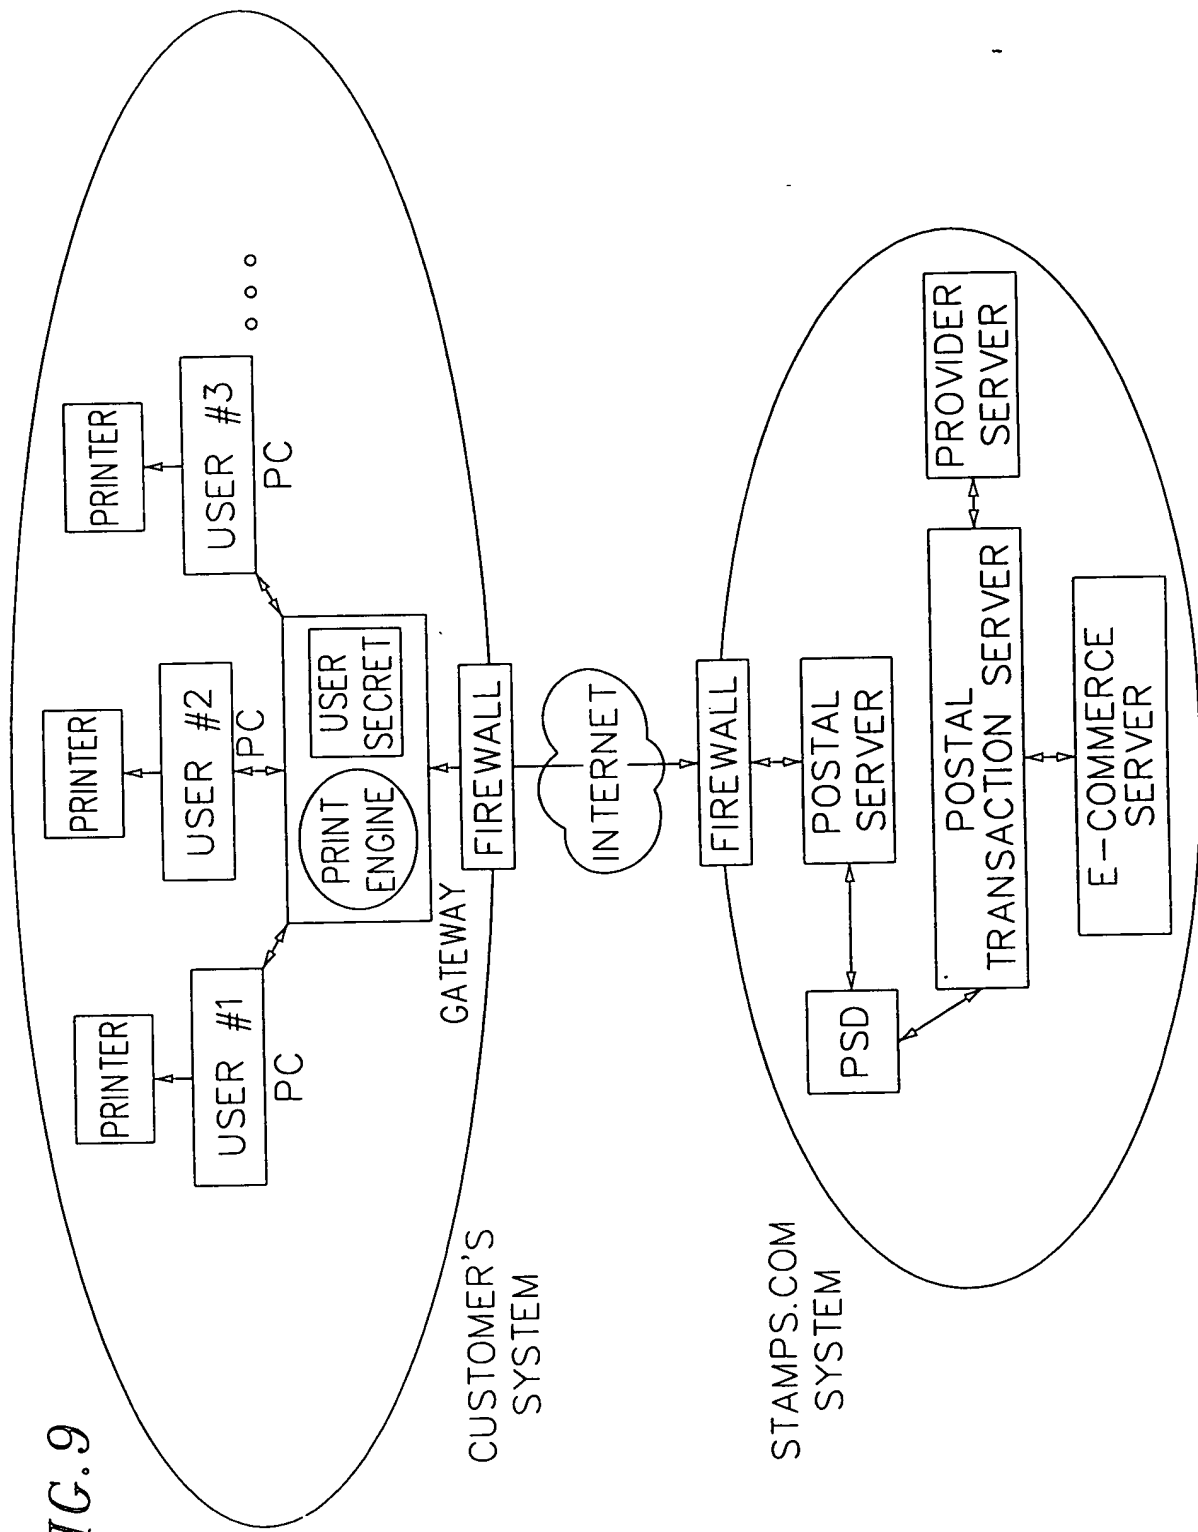